
Pedestrian Crash Types: A 1990's Informational Guide

PUBLICATION NO. FHWA-RD-96-163

APP L 1997



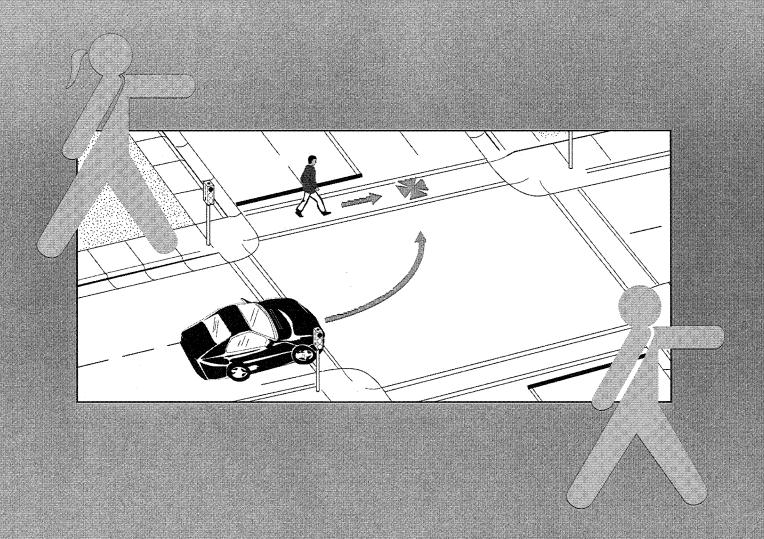

U.S. Department of Transportation

Federal Highway Administration

Research and Development Turner-Fairbank Highway Research Center 6300 Georgetown Pike McLean, VA 22101-2296




Pedestrian Crash Types:

A 1990's Informational Guide

PUBLICATION NO. FHWA-RD-96-163

APRIL 1997

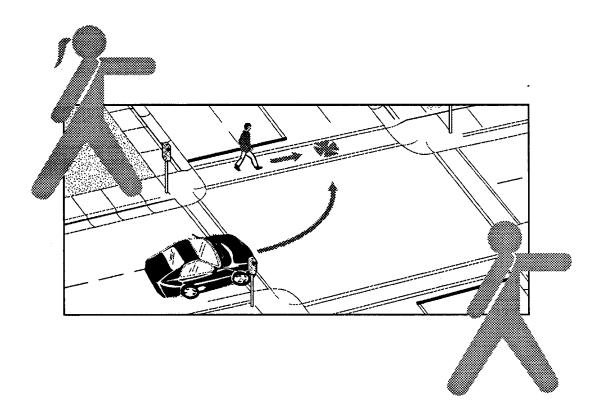



U.S. Department of Transportation
Federal Highway Administration

Research and Development Turner-Fairbank Highway Research Center 6300 Georgetown Pike McLean, VA 22101-2296



FOREWORD

Approximately one out of six highway fatalities in the United States is a pedestrian or bicyclist each year. Estimates for 1995 indicate that 84,000 pedestrians were injured and 5,585 were killed in traffic crashes. These crashes can be classified or "typed" by their precipitating actions, predisposing factors, and characteristic populations and/or location that can be targeted for intervention.

The information provided in the following guide is the result of a Federal Highway Administration (FHWA) research study that applied the basic National Highway Traffic Safety Administration (NHTSA) pedestrian and bicycle typologies to a sample of pedestrian- and bicycle-motor vehicle crashes from six States with the purpose of refining and updating the crash type distributions. Particular attention was given to roadway and locational factors in order to identify situations where engineering, educational, and/or regulatory countermeasures might be effectively implemented to reduce the frequency of the crashes.

This informational guide should be of interest to State and local pedestrian and bicycle coordinators, transportation planners, and transportation engineers involved in safety and risk management. Other interested parties include those in education, enforcement, and the medical profession.

Office of Safety and Traffic Operations

Research and Development

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States government assumes no liability for its contents or use thereof. This report does not constitute a standard, specification, or regulation.

The United States Government does not endorse products or manufacturers. Trade and manufactures' names appear in this report only because they are considered essential to the object document.

Technical Report Documentation Page

FHWA-RD-96-163 4. Title and Subtitle PEDESTRIAN CRASH TYPES: A 1990's Informational Guide 7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safety Research Centre University of North Carolina CB #3430 Chapel Hill, NC 27599-3430 To Title 102-Y-30048 To Supplement Supplement of Safety and Traffic Operations R&D Federal Highway Administration 5300 Georgetown Pike McLean, VA 22701-2296 To Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) To Fire 1990's "(FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distribution with particular attention to roadway and locational factors. The thousand pedestrian- and 300 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash type distribution to road-48 of percent, Herbescherent, Vehicle specific - 9.1 percent, University of the Carolina, and Utah. The pedestrian-motor vehicle crash type, intersection dash) through two-page leyouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" ("HWA-RD-96-104), is available for bicycle-motor vehicle crash-104, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Cudde" ("HWA-RD-96-104), is available for bicycle-motor vehicle crash-to-motor vehicle crash type, safety	1. Report No.	2. Government Acces	sion No. 3	. Recipient's Catalog N	0.
Title and Subilite PEDESTRIAN CRASH TYPES: A 1990's Informational Guide PEDESTRIAN CRASH TYPES: A 1990's Informational Guide PEDESTRIAN CRASH TYPES: A 1990's Informational Guide 7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safety Research Centre University of North Carolina CB #3430 Chapel Hill, NC 27599-3430 Title of Safety and Traffic Operations R&D Federal Highway Administration Soul Georgetown Pike McLean, VA 22101-2296 Tile Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Biocycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to readway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utsh. The pedestrian-motor vehicle crashes were coded as: Special circumstances 2.6 percent, Walking along road/Crossing perpressway -7.9 percent, World road -8.6 percent, Intersection-related -3.21 percent, Milding along road/Crossing perpressway -7.9 percent, World acash type (c.g., intersection dash) through two-page layouts that contain a seketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Security Classif. (of this report) 29.					
PEDESTRIAN CRASH TYPES: A 1990's Informational Guide April 1997 6. Performing Organization Code 7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Report No. William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Report No. 10. Work Unit No. (TRAIS) 3.A4b 11. Contract or Grant No. DTFH61-92-V-30048 13. Type of Report and Period Covered Research Report 8792 - 2195 Federal Highway Administration 6300 Georgetown Pike McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled. "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycles the pagnicies to a sample of recent Counter and Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands and Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands and Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands and Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands Colon bicycle-motor vehicle crash type distributions with particular attention to roadway and locational factors. Five thousands Colon bicycle-motor vehicle crash types general, Vehicle Places were coded in pedestrian-motor vehicle crash types distributed as: Special criminational guide devices dealing and page procent, Michael specific. 9.1 percent, Michael specific. 9.1 percent, Michael specific. 9.1 percent, Michael specific. 9.1 percent, and Other or	FHWA-RD-96-163				
7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Report No. William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safety Research Center University of North Carolina CB 83430 Chapel Hill, NC 27599-3430 12. Sponsoming Agency Name and Address Office of Safety and Traffic Operations R&D Federal Highway Administration 8300 Georgetown Pike McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTS Apedestrian and bicycles tryologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashs were coded in a population-based sample drawn from the States of California, Florida, Mayland, Minnesota, North Carolina, and Utha. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 91 percent, Disabled/Emergency vehicle-refeated - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.21 percent, Midblock - 26.4 percent, and Other or yellow crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summany of the crash types, various graphs, and "bulled" information boxes. A similar information all guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summany of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and			5	. Report Date	
7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Report No. William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safety Research Center University of North Carolina C8 83430 Chapel Hill, NC 27599-3430 The Security Secu	PEDESTRIAN CRASH TYPES: A 1990's	Informational Guide		April 1997	
7. Author(s) William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safety Research Center University of North Carolina CB #3430 11. Contract or Grant No. DTFH61-92-Y-30048 11. Contract or G			6	•	on Code
William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safeky Research Center University of North Carolina CB #3430 Chapel Hill, NC 27599-3430 Ti. Sponsoring Agency Name and Address Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky Agency Code 14. Sponsoring Agency Code 15. Abstract This pedestrian and Sicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of Report North Pedestrian and Dicycle Crash Types of the Early 1990s" (FHWA-RD-96-104) with particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through those page layout stat accordance asketh, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990'					
William W. Hunter, Jane C. Stutts, and Wayne E. Pein 9. Performing Organization Name and Address Highway Safeky Research Center University of North Carolina CB #3430 Chapel Hill, NC 27599-3430 Ti. Sponsoring Agency Name and Address Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky and Traffic Operations R&D Federal Highway Administration Gloe of Safeky Agency Code 14. Sponsoring Agency Code 15. Abstract This pedestrian and Sicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of the Early 1990s" (FHWA-RD-96-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycle Crash Types of Report North Pedestrian and Dicycle Crash Types of the Early 1990s" (FHWA-RD-96-104) with particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through those page layout stat accordance asketh, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990'	7. 041			. Performing Organizati	on Report No
10. Work Unit No. (TRAIS) Sayab 11. Contract or Grant No. 17. Contract or Gran	1	. .			
Highway Safety Research Center University of North Carolina Chapel Hill, NC 27599-3430 Chapel Hill, NC 27599-3430 Chapel Hill, NC 27599-3430 Chapel Hill, NC 27599-3430 Clipage Hill, NC 27599-3430 Cl		lyne E. Pein			
University of North Carolina Chapel Hill, NC 27599-3430 Chapel Hill, NC 27599-3430 13. Type of Report and Period Covered Research Report Roy of Report and Period Covered Research Report Roy 2- 2/95 Rederal Highway Administration Roy Correct Pike McLean, VA 22101-2298 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990s" ("FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes year coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Walking along road/Crossing expressway - 7.9 percent), Not in road - 8.6 percent. This particular information and supplement on specific pedestrian-motor vehicle crash types destrian-motor vehicle crash types destrian-motor vehicle crash types (e.g., intersection-asin) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crash types. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 21. 19. Security Classif. (of this page) 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Infor	1		1	•	•
CB #3430 T2. Sponsoring Agency Name and Address Office of Safety and Traffic Operations R&D Federal Highway Administration 6300 Georgetown Pike McLean, VA 22101-2296 T5. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990s" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycles tryptologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Manyland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.5 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 2.4 percent, Midblock - 2.6 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.2.1 percent, Walking along road/Crossing expressway - 7.9 perce			<u> </u>		
Chapel Hill, NC 27599-3430 13. Type of Report and Period Covered Research Report Research Resoarch Research Resoarch Research Resoarch Research R			1		
12. Sponsoring Agency Name and Address Office of Safety and Traffic Operations R&D Federal Highway Administration 6300 Georgetown Pike McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basis NHTSA pedestrian and bicycles to a sample of recent crashes and to refine and update the crash type distributions the particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Eforida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 3.6 percent, Intersection-related - 3.2.1 percent, Midblock - 24 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and mammary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 18. Security Classif. (of this report) Unclassified Unclassified Unclassified Unclassified			Ļ		
Office of Safety and Traffic Operations R&D Federal Highway Administration 6300 Georgetown Pike McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7, 5 percent, and Other or inadequate information - 7, 5 percent, and Other or inadequate information - 1, 5 percent, 1 particular information and year pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, affect 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 23. Price 24. Price 25. Price 26. Price 27. Price 27. Pr					Period Covered
Federal Highway Administration 6300 Georgetown Pike McLean, VA 22101-22996 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycles tryplogies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locations with particular attention to roadway and locations with particular attention to roadway and locations (From the Company of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicycles to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locations with particular attention to roadway and locations were considered in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Securit		D			
14. Sponsoring Agency Code McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Ventice of the property of the crash special property of the crash special property of the property of the crash type stributed as: Special circumstances 2.6 percent, Walking along road/Crossing expressway - 7.9 percent, North Carolina, and Utah. The pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash types (e.g., intersection) and the crash types (e.g., intersection) and	•	D	8	/92 - 2/95	
McLean, VA 22101-2296 15. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified Unclassified Unclassified Unclassified			<u> </u>		
16. Supplementary Notes Contracting Officer's Technical Representative (COTR) Carol Tan Esse (HSR-20) 16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basis NHTSA pedestrian and bicycles typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.1 percent, Embedded/Emergency vehicle-related - 2.2 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.2 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.2 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.2 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.2 percent, Walking along road/Crossing expressway - 7.9 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information summary of the crash types (e.g., intersection-report) in the particular information boxes. A similar information summary of the crash types (e.g., intersection-report) in the particular informat			11	4. Sponsoring Agency (Code
16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Wilking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified Unclassified Unclassified					
16. Abstract This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 3.21 percent, Michael and provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified Unclassified 29. Price	•	tina (COTD) Carali	T (400 00)		
This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclest type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashs were coded in a population-based sample drawn from the States of California, Florida, Manyland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash type distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 3.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 19. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 20. Security Classif. (of this page)	Contracting Officer's Technical Representa	alive (COTR) Carol	ran Esse (HSR-20)		
This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclest type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashs were coded in a population-based sample drawn from the States of California, Florida, Manyland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash type distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 3.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 19. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 20. Security Classif. (of this page)					
This pedestrian crash type informational guide is a supplement to a research report entitled, "Pedestrian and Bicycle Crash Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and bicyclest type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashs were coded in a population-based sample drawn from the States of California, Florida, Manyland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash type distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 3.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 19. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 20. Security Classif. (of this page)	16 Abstract				
Types of the Early 1990's" (FHWA-RD-95-163). The purpose of the research was to apply the basic NHTSA pedestrian and biocyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified Unclassified Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price 22. Price		iida is a sunnlamon	t to a receased report or	titled "Dedectries or	od Diamala Ossala
bicyclist typologies to a sample of recent crashes and to refine and update the crash type distributions with particular attention to roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified	Types of the Farly 1990's" (FHWA-RD-95-	163) The nurnose	of the research was to a	nnly the basic NHTS	10 Bicycle Crasn
roadway and locational factors. Five thousand pedestrian- and 3,000 bicycle-motor vehicle crashes were coded in a population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblook - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified	bicyclist typologies to a sample of recent c	rashes and to refine	and undate the crash to	pply the basic NHTS	narticular attention to
population-based sample drawn from the States of California, Florida, Maryland, Minnesota, North Carolina, and Utah. The pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified	roadway and locational factors. Five thous	and pedestrian- and	d 3.000 bicycle-motor ve	hicle crashes were o	coded in a
pedestrian-motor vehicle crash types distributed as: Special circumstances 2.6 percent, Vehicle specific - 9.1 percent, Disabled/Emergency vehicle-related - 2.4 percent, Working/Playing in roadway - 3.0 percent, Walking along road/Crossing expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified	population-based sample drawn from the S	States of California,	Florida, Maryland, Minne	esota, North Carolina	. and Utah. The
expressway - 7.9 percent, Not in road - 8.6 percent, Intersection-related - 32.1 percent, Midblock - 26.4 percent, and Other or inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified	pedestrian-motor vehicle crash types distri	buted as: Special c	ircumstances 2.6 percei	nt, Vehicle specific - 9	9.1 percent,
inadequate information - 7.8 percent. This particular informational guide provides detail on specific pedestrian-motor vehicle crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 99	Disabled/Emergency vehicle-related - 2.4 p	percent, Working/Pla	aying in roadway - 3.0 p	ercent, Walking along	g road/Crossing
crash types (e.g., intersection dash) through two-page layouts that contain a sketch, description, and summary of the crash type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified	expressway - 7.9 percent, Not in road - 8.6	percent, Intersection	n-related - 32.1 percent	, Midblock - 26.4 per	cent, and Other or
type, various graphs, and "bullet" information boxes. A similar information guide, "Bicycle Crash Types: A 1990's Informational Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price 99	inadequate information - 7.8 percent. This	particular information	onal guide provides deta	il on specific pedestr	ian-motor vehicle
Guide" (FHWA-RD-96-104), is available for bicycle-motor vehicle crashes. 17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) 21. No. of Pages 22. Price 99	type various graphs and "bullet" information	n two-page layouts	that contain a sketch, de	escription, and summ	nary of the crash
17. Key Words Pedestrian, bicycle, motor vehicle, crashes, crash types, safety 18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 29	Guide" (FHMA-RD-96-104) is available for	on boxes. A similar hicycle-motor yebi	information guide, "Bicy	cie Crasn Types: A	1990's Informational
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified	Galac (171777-175-50-104), is available to	bicycle-motor verm	de clasties.		
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
Pedestrian, bicycle, motor vehicle, crashes, crash types, safety No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified					
the National Technical Information Service, Springfield, Virginia 22161 19. Security Classif. (of this report) Unclassified 20. Security Classif. (of this page) Unclassified 21. No. of Pages 22. Price Unclassified 99				-	
22161 19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified 99		, crash types,	No restrictions. This d	ocument is available	to the public through
19. Security Classif. (of this report) 20. Security Classif. (of this page) 21. No. of Pages 22. Price Unclassified Unclassified 99	salety			Information Service,	Springfield, Virginia
Unclassified Unclassified 99			22101		
Unclassified Unclassified 99					
Unclassified Unclassified 99					
	19. Security Classif. (of this report)	20. Security Classi	f. (of this page)	21. No. of Pages	22. Price
	l Inglessiës d				
	Unclassified	1	nciassified	99	

Form DOT F 1700.7 (8-72)

Reproduction of completed page authorized

ı	ω.
	Y.
	¥
	**
	w

Miles To Find Symbol When You Know Multiply By To Find To Find Symbol When You Know Multiply By To Find To Find			SI* (MO	(MODERN MET	METRIC) (CONVERSION	SION FACTORS	RS		
Myten You Know Multiply By To Find Symbol When You Know Multiply By To Find Symbol When You Know Multiply By To Find Electronia I		APPROXIMATE CO	NVERSIONS TO	ဟ			APPROXIMATE COI	NVERSIONS FF	ROM SI UNITS	
Factor F	Symbol	When You Know	Multiply By	To Find	Symbol	Symbol	When You Know	Multiply By	To Find	Symbol
Inches Companies Compani			LENGTH					LENGTH		
Temperature 0.305	ء	inches	25.4	millimeters	E	ww w	millimeters	0.039	inches	.⊆
yards	#	feet	0.305	meters	ε	٤	meters	3.28	feet	#
March Marc	λ.	yards	0.914	meters	٤	ε.	meters	1.09	yards	ጆ.
AREA AREA square linches 645.2 square melers 0.033 square melers 0.0016 0.0016 square linches 0.045 square melers 1.0744 m² square melers 1.0754 square linches 0.045 square melers 1.0764 m² square melers 1.105 square linches 0.045 square melers 1.105 m² square melers 1.105 qualions 2.59 square klometers m² square klometers 2.47 qualions 3.785 liters L L L L cubic melers m² m² cubic melers 3.71 m² cubic melers m² m² cubic melers 3.71 m² cubic melers m² m² cubic melers 3.57 cubic melers m² m² cubic melers 3.57 cubic melers m² m² cubic melers 3.57 cubic melers m²	Ē	miles	1.61	kilometers	Æ	Ē	kilometers	0.621	miles	Ē
square inches 645.2 square melers square melers mm² square millimeters mm² square millimeters in cases mm² square millimeters in cases in cases mm² square millimeters in cases			AREA					AREA	•	
Square meters 10.764 Square meters 1.95 Squa	2°.	square inches	645.2	souare millimeters	mm ₂	mm²	square millimeters	0.0016	square inches	in
square pards 0.886 square meters m² square meters 1.195 that across acces 0.405 square flowmeters meters m² square meters 1.195 that across square miles 2.59 square flowmeters m² square flowmeters m² square flowmeters 1.195 that across fluid ounces 2.59 square miles 2.59 square flowmeters milliliters m² cubic meters 0.284 that square flowmeters m² cubic meters 0.284 that square flowmeters m² cubic meters 1.307 that square flowmeters m² cubic meters m² cubic meters 1.307 that square flowmeters m² cubic meters 1.307 that square flowmeters m² cubic meters 1.307 that square flowmeters 1.307 that square flowmeters m² cubic meters 1.307 that square flowmeters 1.307 that square flowmeters m² cubic meters 1.307 that square flowmeters 1.308 that square flowmeters <	<u>∓</u>	square feet	0.093	square meters	m ₂	m,	square meters	10.764	square feet	뫋
across 0.405 hectares had because a square kilometers had because because a square kilometers had because because a square kilometers had because a square ki	χφ	square yards	0.836	square meters	E E	m²	square meters	1.195	square yards	ydg
March Marc	မှု ရ	acres	0.405	hectares	ha	ha	hectares	2.47	acres	ဗ္ဗ
Full counces 29.57 millilitiers m² mL milliliters 0.034			Z.Sg. 7OLUME	square kilometers	km Km	_	square kilometers	VOLUME	sduare miles	Ē
Fabricandies 29.57 milliliters mL mL milliliters mL mL milliliters 0.024										
Color candles 3.785 Hiers L Hiers 0.264	fl oz	fluid ounces	29.57	milliliters	닡	핕	milliliters	0.034	fluid ounces	fl oz
cubic yards 0.028 cubic meters cubic meters m³ cubic meters 35.71 cubic meters MASS MASS MASS MASS Cubic meters m³ cubic meters 1.307 MASS MASS Outcoss 28.35 grams grams 0.035 kg kilograms AMSS pounds 0.454 kilograms kilograms 2.202 kg kilograms 1.103 pounds 0.454 kilograms kilograms 2.202 kg kilograms 1.103 pounds 0.454 kilograms kilograms 0.035 kg kilograms 1.103 pounds 0.61-32/9 Colcius °C Colcius 1.8C + 32 foot-candles 10.76 lux lux lux lux pounditores 4	eg.	gallons	3.785	liters		۔۔	liters	0.264	gallons	gal
Cubic yards	<u></u>	cubic feet	0.028	cubic meters	E E	ື ສຳ	cubic meters	35.71	cubic feet	2
MASS	گر 	cubic yards	0.765	cubic meters	Ë.	Ë	cubic meters	1.307	cubic yards	ъ Х
MASS MASS ounces 28.35 grams g g grams 0.035 pounds 0.454 kilograms (or "metric ton") (or "t") (or "t") (or "t") (or "metric ton") Fahrenheit 5(F-32)/9 Celcius °C Celcius °C Celcius 1.103 or (F-32)/1.8 temperature °C Celcius °C Celcius 1.8C + 32 10.76 lux kimperature candela/m² 0.0929 foot-candles 10.76 lux kinopascals kinopascals N 6.89 kilopascals KPa kilopascals 0.145	NOTE: \	/olumes greater than 1000		™³ .						
ounces 28.35 pounds grams wilegrams wilegrams 4g kg kilograms (Appendix on 1.03) grams (Appendix on 1.03) 6.202 (Appendix on 1.03) Fahrenheit 5(F-32/9) or (F-32/1.8 temperature) Celcius °C Celcius (Appendix on 1.076) Celcius (Appendix on 1.076) Ix IX<			MASS					MASS		
Pounds	02	seouno	28.35	drams	5	5	grams	0.035	seouno	20
TEMPERATURE (exact)	<u>.</u>	spunod	0.454	kilograms	2	, X	kilograms	2.202	spunod	<u> </u>
Fahrenheit 5(F-32)/9 colcius Celcius °C Celcius TEMPERATURE (exact) Fahrenheit 5(F-32)/9 colcius Celcius °C Celcius 1.8C + 32 foot-candles 10.76 lux lux lux 0.0929 foot-candles 10.76 lux lux lux 0.2919 foot-Lamberts 3.426 candels/m² candels/m² calm cd/m² candels/m² calm Colm² candels/m² calm Colm² candels/m² calm Colm² candels/m² calm poundforce per 6.89 kilopascals 6.89 kilopascals kPa kPa kilopascals 0.145	۲	short tons (2000 lb)	0.907	megagrams	èδ	Mg	megagrams	1.103	short tons (2000	T (q) C
TEMPERATURE (exact) Fahrenheit 5(F-32)/9 (celcius) Celcius temperature °C °C Celcius temperature 1.8C + 32 temperature or (F-32)/1.8 temperature temperature temperature °C Celcius temperature 1.8C + 32 ILLUMINATION foot-candles 10.76 lux candela/m² calmanents 10.0929 candela/m² calmanents Calm² candela/m² calmanents O.0929 candela/m² calmanents FORCE and PRESSURE or ST kilopascals poundforce per candelar calmanents 4.45 lux candelar calmanents N newtons Cod/m² candelar candelar calmanents Cod/m² candelar candelar candelar calmanents Cod/m² candelar cande			1	(or "metric ton")	(or "t")	(or "t")	(or "metric ton")			
Fahrenheit 5(F-32)/9 (redius) Celcius °C Celcius 1.8C + 32 temperature or (F-32)/1.8 temperature 1.8C + 32 temperature 1.0.76 lux Ix 0.0929 0.2919 O.2919 O.20145 O.3919		TEMPER	ATURE (exact)				TEMPE	RATURE (exac	₽ı	
foot-candles 10.76 lux IX Iux 0.0929 foot-Lamberts 3.426 candela/m² cd/m² cd/m² candela/m² 0.2919 FORCE and PRESSURE or STRESS poundforce 4.45 newtons N newtons 0.225 poundforce per 6.89 kilopascals kPa kilopascals 0.145	ů.	Fahrenheit temperature	5(F-32)/9 or (F-32)/1.8	Celcius temperature	ပွ	ပွ	Celcius temperature	1.8C + 32	Fahrenheit temperature	Ļ
foot-candles 10.76 lux lx lux 0.0929 foot-Lamberts 3.426 candela/m² cd/m² cd/m² 0.2919 FORCE and PRESSURE or STRESS poundforce 4.45 newtons N newtons 0.225 poundforce per 6.89 kilopascals kPa kilopascals 0.145		ILLU	MINATION				2	LUMINATION		
FORCE and PRESSURE or STRESS FORCE and PRESSURE or ST poundforce 4.45 newtons N newtons 0.225 poundforce per 6.89 kilopascals kPa kilopascals 0.145	\$ =	foot-candles foot-Lamberts	10.76 3.426	lux candela/m²	x cd/m²	IX cd/m²	lux candela/m²	0.0929 0.2919	foot-candles foot-Lamberts	\$ =
poundforce per 6.89 kilopascals KPa kilopascals 0.145 square inch		FORCE and PR		SS3			FORCE and F	PESSURE or	TRESS	
poundforce per 6.89 kilopascals kPa KPa kilopascals 0.145 square inch	ğ	poundforce	4.45	newtons	z	z	newtons	0.225	poundforce	lòf
	lbf/in²	poundforce per square inch		kilopascals	кРа	кРа	kilopascals	0.145	poundforce per square inch	lbf/in²

* SI is the symbol for the International System of Units. Appropriate rounding should be made to comply with Section 4 of ASTM E380.

TABLE OF CONTENTS

		Page
ABOUT THIS INFORMATIONAL GUIDE		1
Background		1
The Crash Typology		2
Individual Crash Types		3
An Orientation to the Individual Crash Type Information		3
Pedestrian - Motor Vehicle Crash Types		9
Special Circumstances		9
Commercial Bus Related		
Ice Cream Vendor Mailbox Related		. 14
Exiting or Entering Parked Vehicle		
Vehicle Specific		. 21
Driverless Vehicle Backing Vehicle Hot Pursuit		. 24
Disabled/Emergency Vehicle Related		. 29
Disabled Vehicle Related		. 30
Working/Playing In Roadway	. 	. 33
Working On Roadway Play Vehicle Related Playing In Roadway		. 36
Walking Along Road/Crossing Expressway	. 	. 41
Walking Along Road Expressway Crossing		

TABLE OF CONTENTS (Continued)

Pag	ţе
Not In Road	17
Waiting To Cross4	4 8
Not In Roadway	
Intersection Related	53
Multiple Threat At Intersection 5	54
Vehicle Turn/Merge 5	56
Intersection Dash	
Trapped	
Walked Into Vehicle At Intersection	
Driver Violation At Intersection	
Intersection—Other6	
Midblock Related	59
Multiple Threat At Midblock	70
Midblock Dart Out 7	
Midblock Dash	
Walked Into Vehicle At Midblock 7	
Midblock—Other	
Other or Inadequate Information	31
Lying In Road 8	32
Suicide	
Assault With Vehicle	
Domestic/Dispute Related	
Pedestrian On Vehicle	36
Vehicle-Vehicle Crash	
	38
Weird 8	
Inadequate Information 9	
)1

LIST OF FIGURES

Figure		Page
1	Pedestrian age in "Commercial Bus Related"	1(
2	Light condition, number of lanes, and speed limit in "Commercial	
2	Bus Related"	11
3	Pedestrian age in "School Bus Related"	12
4	Light condition, number of lanes, and speed limit in "School Bus Related".	13
5	Pedestrian age in "Ice Cream Vendor"	14
6	Light condition, number of lanes, and speed limit in "Ice Cream Vendor"	15
7	Pedestrian age in "Mailbox Related"	16
8	Light condition, number of lanes, and speed limit in "Mailbox Related"	17
9 ` 10	Pedestrian age in "Exiting Or Entering Parked Vehicle"	18
10	Light condition, number of lanes, and speed limit in "Exiting Or	
1.1	Entering Parked Vehicle"	19
11	Pedestrian age in "Driverless Vehicle"	22
12	Light condition in "Driverless Vehicle"	23
13	Pedestrian age in "Backing Vehicle"	24
14 15	Light condition in "Backing Vehicle"	25
15 16	Pedestrian age in "Hot Pursuit"	26
17	Pedestrian age in "Disabled Vehicle Related"	30
17	Light condition, number of lanes, and speed limit in "Disabled Vehicle Related"	
18		
19	Pedestrian age in "Working On Roadway"	
20	Light condition, number of lanes, and speed limit in "Working On Roadway"	. 35
21	Pedestrian age in "Play Vehicle Related"	36
22	Light condition, number of lanes, and speed limit in "Play Vehicle Related"	37
23	Pedestrian age in "Playing In Roadway" Light condition, number of lanes, and speed limit in "Playing In Roadway"	38
24	Pedestrian age in "Walking Along Road"	<i>3</i> 9
25	Light condition, number of lanes, and speed limit in "Walking Along Road"	42
26	Pedestrian age in "Expressway Crossing"	43
27	Light condition, number of lanes, and speed limit in "Expressway Crossing"	44 15
28	Pedestrian age in "Waiting to Cross"	. 43
29	Light condition, number of lanes, and speed limit in "Waiting To Cross"	40 40
30	Pedestrian age in "Not In Roadway"	49 50
31	Light condition in "Not In Roadway"	<i>5</i> 0
32	Pedestrian age in "Multiple Threat At Intersection"	
33	Light condition, number of lanes, and speed limit in "Multiple Threat At	54
	Intersection"	55
34	Pedestrian age in "Vehicle Turn/Merge"	<i>55</i> 56
35	Light condition, number of lanes, and speed limit in "Vehicle Turn/Merge"	. 50 57
36	Pedestrian age in "Intersection Dash"	. 58

LIST OF FIGURES (Continued)

Figure	Pa	ge
37	Light condition, number of lanes, and speed limit in "Intersection Dash"	59
38	Pedestrian age in "Trapped"	
39	Light condition, number of lanes, and speed limit in "Trapped"	61
40	Pedestrian age in "Walked Into Vehicle At Intersection"	62
41	Light condition, number of lanes, and speed limit in "Walked Into	
	Vehicle At Intersection"	63
42	Pedestrian age in "Driver Violation At Intersection"	64
43	Light condition, number of lanes, and speed limit in "Driver Violation At Intersection"	65
44	Pedestrian age in "Intersection—Other"	
45	Light condition, number of lanes, and speed limit in "Intersection—Other"	
46	Pedestrian age in "Multiple Threat At Midblock"	
47	Light condition, number of lanes, and speed limit in "Multiple Threat At	
	Midblock"	71
48	Pedestrian age in "Midblock Dart Out"	
49	Light condition, number of lanes, and speed limit in "Midblock Dart Out"	
50	Pedestrian age in "Midblock Dash"	
51	Light condition, number of lanes, and speed limit in "Midblock Dash"	
52	Pedestrian age in "Walked Into Vehicle At Midblock"	
53	Light condition, number of lanes, and speed limit in "Walked Into Vehicle	
	At Midblock"	77
54	Pedestrian age in "Midblock—Other"	78
55	Light condition, number of lanes, and speed limit in "Midblock—Other"	79
56	Light condition in "Lying In Road"	82
57	Pedestrian age in "Lying In Road"	82
58	Light condition in "Suicide	
59	Pedestrian age in "Suicide"	
60	Light condition in "Assault With Vehicle"	
61	Pedestrian age in "Assault With Vehicle"	
62	Light condition in "Domestic/Dispute Related"	
63	Pedestrian age in "Domestic/Dispute Related"	
64	Light condition in "Pedestrian On Vehicle"	
65	Pedestrian age in "Pedestrian On Vehicle"	
66	Light condition in "Vehicle-Vehicle Crash"	
67	Pedestrian age in "Vehicle-Vehicle Crash"	
68	Light condition in "Vehicle-Object Crash"	
69	Pedestrian age in "Vehicle-Object Crash"	
70 71	Light condition in "Weird"	
71 7 2	Pedestrian age in "Weird"	
72 72	Light condition in "Inadequate Information"	
73	Pedestrian age in "Inadequate Information"	90

ABOUT THIS INFORMATIONAL GUIDE

Background

This publication provides information about pedestrian-motor vehicle crash types of the early 1990's. The crash types follow closely the current National Highway Traffic Safety Administration (NHTSA) coding convention used with the General Estimates System (GES) data, whereby a stratified sample of crashes reported by police from across the United States are used to make national estimates of the occurrence and severity of pedestrian-motor vehicle crashes. The crash types are based on research carried out by Snyder and Knoblauch in the early-1970's. Thirty-seven distinct crash types are identified in the NHTSA typology. Examples include:

- ► Dart-out.
- ► Intersection dash.
- Walking along road.
- Backing vehicle.

The data for the publication are part of a research project carried out for the Centers for Disease Control, with funding provided by the Federal Highway Administration (FHWA). The purpose of this research was to apply the basic NHTSA crash typologies to a sample of recent crashes and to refine and update the crash type distributions with particular emphasis on roadway and locational factors. The parent research project covers 5,000 pedestrian- and 3,000 bicyclemotor vehicle crashes selected equally from six States (California, Florida, Maryland, Minnesota, North Carolina, and Utah) and reports findings pertinent to primary groups of crashes (see Hunter, Stutts, Pein and Cox, "Pedestrian and Bicycle Crash Types of the Early 1990's, FHWA-RD-95-163, February 1995). This informational guide provides detail on specific crash types and is concerned with only the 5,000 pedestrian-motor vehicle crashes from the six States. The pedestrian sample was derived by selecting more than 800 police-reported crashes from small, medium, and large communities within each State.

Police report hard copies were examined to code the specific crash type, as well as many other items. Additional items coded and analyzed included:

- ► Crash descriptors (motor vehicle-pedestrian pre-crash maneuvers, time of day, etc.).
- ► Locational descriptors (road feature, private property details, etc.).

- ► Pedestrian characteristics (age, special equipment used, etc.).
- ► Driver contributing factors (yield violation, alcohol use, etc.).
- ► Pedestrian contributing factors (jaywalking, ran into street, etc.).
- ► Motor vehicle contributing factors (defective brakes, unclear windshield, etc.).
- ► Roadway/environment contributing factors (weather condition, sun glare, etc.).
- ► Fault (driver only, pedestrian only, neither, etc.).

In addition to coding the crash type and other variables discussed above, the cases were linked to the basic crash file for each State. This enabled the use of many more variables in the analysis, such as age and gender of pedestrian and driver, other roadway descriptors, and motor vehicle variables. Upon completion of clean-up and file linkage, approximately 5,000 cases were available for analysis.

The Crash Typology

The crash types are broadly distributed into nine main categories. For this particular data set, the distribution of crashes was the following:

- ► Special circumstances (133 crashes, 2.6 percent of total).
- ► Vehicle specific (460 crashes, 9.1 percent of total).
- ► Disabled/Emergency vehicle-related (124 crashes, 2.4 percent of total).
- ► Working/Playing in roadway (152 crashes, 3.0 percent of total).
- ► Walking along road/Crossing expressway (400 crashes, 7.9 percent of total).
- ► Not in road (436 crashes, 8.6 percent of total).
- ► Intersection-related (1,630 crashes, 32.1 percent of total).
- ► Midblock (1,341 crashes, 26.4 percent of total).
- ▶ Other or inadequate information (397 crashes, 7.8 percent of total).

The intersection-related and midblock events were the most frequent, accounting for almost 60 percent of all crashes. Detailed results about these groups of crash types are contained in the final report for the project (Hunter, Stutts, Pein and Cox, 1995).

[Note: The appendix of this informational guide contains coding guidelines for pedestrian crash typing. These guidelines were adapted from NHTSA's "Manual Accident Typing for Pedestrian Accidents - Coder's Handbook." The Coder's Handbook can be found in Appendix A of the parent document, "Pedestrian and Bicycle Crash Types of the Early 1990's (FHWA-RD-95-163).]

Individual Crash Types

Within the 9 crash groups are 37 individual crash types. For example, the group of crashes entitled "Vehicle specific" is made up of the following individual crash types:

- ► **Driverless vehicle**—Pedestrian struck was driver of the vehicle.
- ▶ **Driverless vehicle**—Pedestrian struck was not the driver of the vehicle.
- ▶ Backing vehicle—Pedestrian struck by a vehicle which was backing.
- ► Hot pursuit—Pedestrian struck by a vehicle on an emergency/police mission, or by a vehicle being pursued.

The focus of the remainder of this document is detailed information about many of the 37 individual crash types. Two-page layouts (i.e., left and right facing pages) are used for each individual crash type to convey a variety of information. The order of the presentation parallels NHTSA's Coder's Handbook.

An Orientation to the Individual Crash Type Information

Each two-page layout basically contains the information presented below (a few differ because of small numbers of crashes). Examine the example pages for "Vehicle Turn/Merge" that follow for a more thorough orientation.

Left Side Page

- ▶ A <u>title bar</u>, with additional information about the <u>frequency</u> and <u>severity</u> of the crash. The severity is based on the typical "KABCO" scale used by police, where "K" is killed, an "A" injury is defined as serious, "B" moderate, "C" minor, and "O" no injury.
 - ► A sketch that shows a simple depiction of the event. Various backgrounds are used,

such as an urban intersection, a rural intersection, a suburban location, a residential location, a rural location, etc.

- ► A <u>description</u> of the crash type.
- A <u>summary</u> of the crash type that includes a variety of information. Generally there are comments about the ages of the involved pedestrians, the light condition, number of lanes, speed limit, crash severity, alcohol use, etc. No exposure data were available for the analysis, so comparisons for a variable within a particular crash type are often made with all crashes combined (e.g., ages of pedestrians involved in "Vehicle Turn/Merge" compared with pedestrian age for all crashes). The same would be true for the other variables mentioned above. Overall, over 33 percent of the crashes resulted in severe and fatal (A+K) injuries to the pedestrian. The summary usually comments on whether the individual crash type was more or less severe than this average. It was normally the case that lower speed crashes (e.g., those occurring primarily in neighborhoods) resulted in less severity than higher speed crashes (e.g., those occurring more often on rural highways).
- ► A <u>bar chart</u> of the ages of the involved pedestrians for the particular crash type versus all crash types combined. Information for the crash type discussed on the two pages is always shown in green and the "all crash type" comparison is always shown in black.


Right Side Page

- ► Graphs of the <u>light condition</u>, the <u>number of lanes</u>, and the <u>speed limit</u> for the particular crash type (where applicable) versus all crash types combined. Again, the information for the crash type discussed on the two pages is shown in green and the "all crash type" comparison is shown in black.
- ► "Bullet" boxes that pertain to variables of interest for this particular crash type.

 "Alcohol Use," "Development Character," (urban versus rural), "Day of Week," "Road Feature," and "Pedestrian Location" generally appear in this area.


All two-page layouts are generally similar for ease in comparison. However, differences may appear depending on the amount of detail available for a particular crash type. As an

example, the crash type labeled as "Other -Weird" contains no drawing of the event because circumstances could be so variable from one "weird" crash to another that a "typical" drawing is very difficult to define. The appendix describes the process followed in assigning a crash type code to the individual crash reports examined.

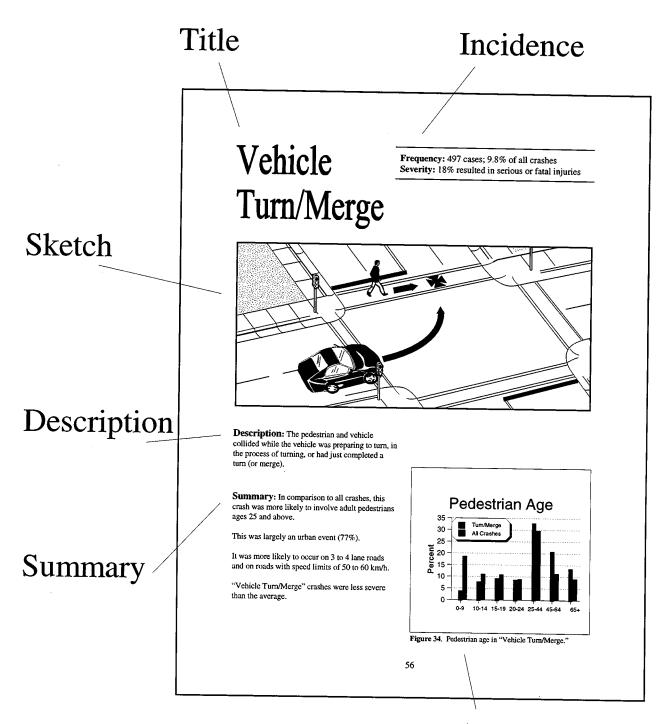

Age Chart

Layout diagram - left side.

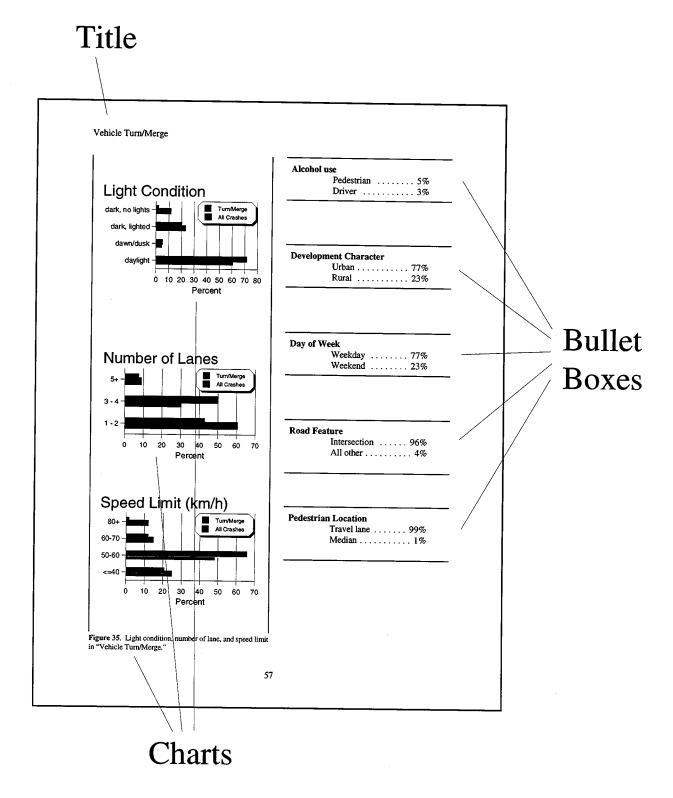

Layout diagram - right side.

·		


Pedestrian-Motor Vehicle Crash Types

Special Circumstances

Commercial Bus Related

Frequency: 22 cases; 0.4% of all crashes

Severity: 23% resulted in serious or fatal injuries

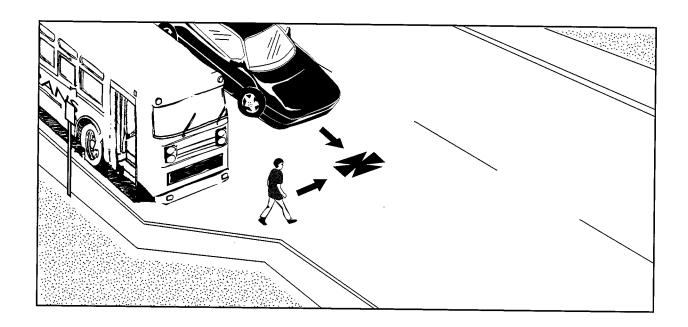

Description: The pedestrian was struck by another vehicle while crossing in front of a commercial bus stopped at a marked bus stop.

Summary: In comparison to all crashes, this crash was more likely to involve youth (age 10 to 14) and especially teen (age 15 to 19) pedestrians who accounted for almost half of these events.

This was largely an urban event (77%). Eighty percent occurred on roads with a speed limit of 50 to 60 km/h (30 to 35 mi/h), and more than 40 percent occurred under dark, lighted conditions.

Alcohol involvement was lower than the average for pedestrians, but higher than the average for the motorist. This crash tended to be less severe than the average.






Figure 1. Pedestrian age in "Commercial Bus Related."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 2. Light condition, number of lanes, and speed limit in "Commercial Bus Related."

Alcohol use

Pedestr	ian					5%
Driver				•		9%

Development Character

Urban						77%
Rural						23%

Day of Week

Weekday				68%
Weekend				32%

Road Feature

No special	feature	56%
Intersectio	n	44%


Pedestrian Location

Travel lane							100%
-------------	--	--	--	--	--	--	------

School Bus Related

Frequency: 22 cases; 0.4% of all crashes

Severity: 32% resulted in serious or fatal injuries

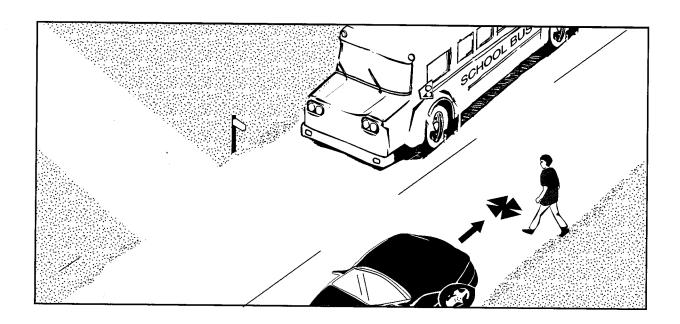

Description: The pedestrian was struck going to or from a school bus or school bus stop.

Summary: This crash involved only child (age 0 to 9), youth (age 10 to 14) and teen (age 15 to 19) pedestrians.

The vast majority of these crashes occurred during daylight hours. Most occurred on 1 to 2 lane roads and on roads with speed limits of 60 km/h or less.

More than 40 percent occurred in rural areas. None involved alcohol.

"School Bus Related" crashes were of average severity.




Figure 3. Pedestrian age in "School Bus Related."

dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100 Percent

Number of Lanes 5+ School Bus All Crashes 1-2 0 20 40 60 80 100 Percent




Figure 4. Light condition, number of lanes, and speed limit in "School Bus Related."

Alcohol use	
Pedestrian	0%
Driver	0%
	 ·

Development Character	
Urban	59%
Rural	41%

Day of Week		_
Weekday	86%	
Weekend	14%	
		


Road Feat	ure
	No special feature 52%
	Intersection 38%
	Public driveway 5%
	Other 5%

Pedestrian Location	
Travel lane 95%	
Shoulder 5%	

Ice Cream Vendor

Frequency: 40 cases; 0.8% of all crashes

Severity: 21% resulted in serious or fatal injuries

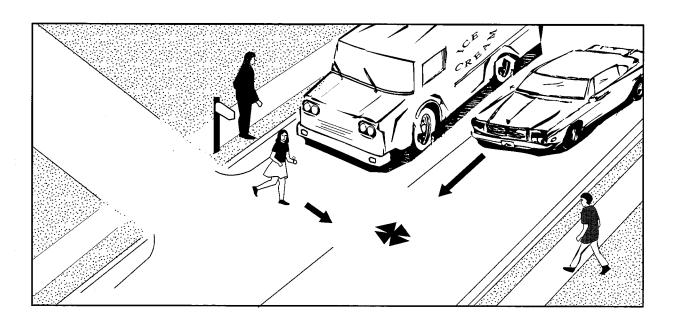

Description: The pedestrian was struck while going to or from an ice cream vendor and the striking vehicle was on the same street as the vendor.

Summary: In comparison to all crashes, this crash was more likely to involve child (age 0 to 9) and youth (age 10 to 14) pedestrians.

Daylight, 1 to 2 lane roads, and roads with a speed limit less than or equal to 40 km/h were strongly overrepresented. Urban areas were also overrepresented.

None of the pedestrians and only 5 percent of the motorists had been drinking.

"Ice Cream Vendor" crashs tended to be less severe than the average.

Pedestrian Age




Figure 5. Pedestrian age in "Ice Cream Vendor."

dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100

Percent




Figure 6. Light condition, number of lanes, and speed limit in "Ice Cream Vendor."

Alcohol use	
Pedestrian 0%	
Driver 5%	
DIIVCI	

Development Character	
Urban 79%	
Rural 21%	

Day of Week	
Weekday	64%
Weekend	36%

Road Feature
No special feature 82%
Intersection 6%
Private driveway 6%
Public driveway 3%
Other 3%

Pedestrian Location Travel lane 95% Parking lot lanes 3% Parking lot unknown 3%

Mailbox Related

Frequency: 16 cases; 0.3% of all crashes

Severity: 50% resulted in serious or fatal injuries



Description: The pedestrian was struck while going to or from a private residence mailbox or newspaper box.

Summary: In comparison to all crashes, this crash was more likely to involve child (age 0 to 9) and elderly (age 65+) pedestrians.

This was largely a rural event (63%). All took place on 1 to 2 lane roads, and higher speed roads were strongly overrepresented. Forty percent took place on roads with a speed limit of 80 km/h or greater.

Alcohol was generally not a factor in these crashes. Although the number of cases was small, this crash was much more likely than average to result in a serious or fatal injury.




Figure 7. Pedestrian age in "Mailbox Related."

dark, no lights dark, lighted dawn/dusk daylight 20 40 60 80 100

Percent

Number of Lanes 5+ Mailbox All Crashes 1 - 2 0 40 60 80 100 Percent




Figure 8. Light condition, number of lanes, and speed limit in "Mailbox Related."

lcohol 1	use
	Pedestrian 0%
	Driver 0%
evelopi	ment Character
	Urban 38%
	Rural 63%

eature
No special feature 62%
Private driveway 31%
Intersection 8%

Weekday 69%


Weekend 31%

Pedestrian Location		
Travel lane	100%	

Exiting Or Entering Parked Vehicle

Frequency: 33 cases; 0.7% of all crashes

Severity: 31% resulted in serious or fatal injuries

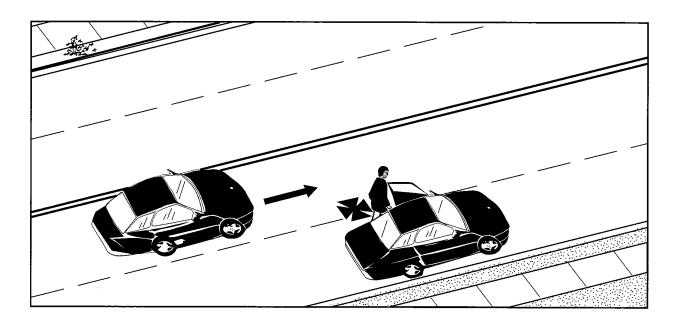

Description: The pedestrian was in the process of exiting or entering a parked or stopped vehicle and was struck in the adjacent traffic lane.

Summary: In comparison to all crashes, this crash was more likely to involve adult (age 25 to 44) and middle adult (age 45 to 64) pedestrians.

Almost half occurred on the weekend as compared to 35 percent for all crashes combined.

Fifteen percent of the drivers had been drinking but only 4 percent of pedestrians.

This crash type was of average severity.

Pedestrian Age




Figure 9. Pedestrian age in "Exiting Or Entering Parked Vehicle."

dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent

Number of Lanes 5+ Parked All Crashes 3 - 4 All Crashes 0 10 20 30 40 50 60 70 Percent




Figure 10. Light condition, number of lanes, and speed limit in "Exiting Or Entering Parked Vehicle."

Alcohol use	
Pedestrian 4% Driver 15%	

Development Character	
Urban 72%	
Rural 28%	

Day of Week	
	52% 48%

Road Feature	
No special feature 78%	
Intersection 19%	
Other 3%	

Pedestrian Location	
Travel lane 70%	
On-street parking 18%	
Parking lot lanes 3%	
Shoulder 3%	
Other 6%	


		·	
	·		
·			

Pedestrian-Motor Vehicle Crash Types

Vehicle Specific

Driverless Vehicle

Frequency: 104 cases; 2.1% of all crashes Severity: 38% resulted in serious or fatal injuries

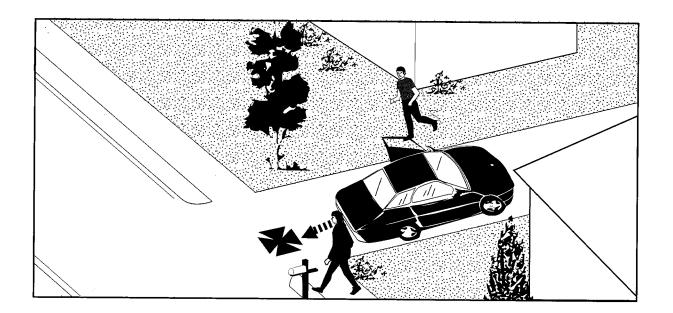

Description: The pedestrian was struck by a vehicle that was moving without a driver at the controls or was set into motion by the actions of a child.

Summary: In comparison to all crashes, this event was more likely to involve pedestrians age 25 and older.

In 77 percent of these crashes the struck pedestrian was **not** the original driver of the vehicle.

Thirty-seven percent happened in a parking lot, and an additional 20 percent in a driveway or alley.

More than 80 percent occurred during daylight. "Driverless Vehicle" crashes were slightly more severe than average.

Pedestrian Age Driverless All Crashes Driverless All Crashes 10 10 5

10-14 15-19 20-24 25-44 45-64

Figure 11. Pedestrian age in "Driverless Vehicle."

dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100 Percent

Number of Lanes and Speed Limit graphs are not shown because this crash type most often occurs offroad.

Alcohol use	
Pedestrian 2%	
Driver 0%	

Development Character	
Urban	61%
Rural	39%

Day of Week	
Weekday	69%
Weekend	31%

Road Feature
No special feature 35%
Private driveway 17%
Public driveway 6%
Intersection 5%
Alley
All other 37%


Pedestrian Location
Travel lane 26%
Parking lot space 25%
Alley/Driveway 20%
Parking lot lanes 8%
Parking lot, other 4%
All other 18%

Figure 12. Light condition in "Driverless Vehicle."

Backing Vehicle

Frequency: 351 cases; 6.9% of all crashes

Severity: 23% resulted in serious or fatal injuries

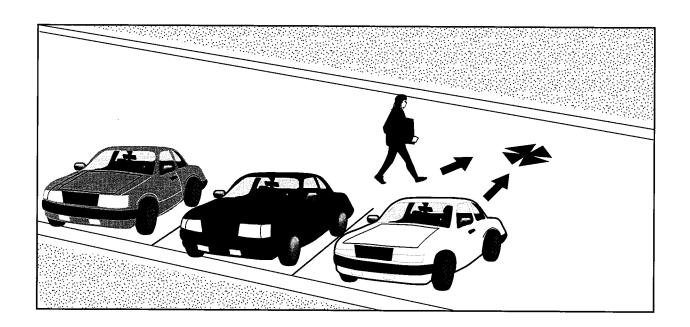

Description: The pedestrian was struck by a vehicle that was backing.

Summary: In comparison to all crashes, this crash was more likely to involve elderly (age 65+) pedestrians.

Forty-four percent occurred in a parking lot location, and 13 percent in a driveway or alley.

Overall, 11 percent of pedestrians had been drinking, and 19 percent of those ages 20 to 44.


"Backing" crashes were less severe than the average.

Pedestrian Age Backing All Crashes 15 10 5

10-14 15-19 20-24 25-44 45-64

Figure 13. Pedestrian age in "Backing Vehicle."

Light Condition



Number of Lanes and Speed Limit graphs are not shown because these variables are not relevant to this crash type.

Alcohol use

Pedestrian			•		11%
Driver					. 6%

Development Character

Urban						62%
Rural						38%

Day of Week

Weekday	•	•	•	•	68%
Weekend					32%

Road Feature

No special feature 19%
Private driveway 15%
Intersection 9%
Public driveway 9%
Alley
All other 48%

Pedestrian Location


Parking lot space 31%
Travel lane 23%
Alley/Driveway 13%
Parking lot lanes 8%
Parking lot unknown 5%
All other 20%

Figure 14. Light condition in "Backing Vehicle."

Hot Pursuit

Frequency: 5 cases; 0.1% of all crashes

Severity: 60% resulted in serious or fatal injuries

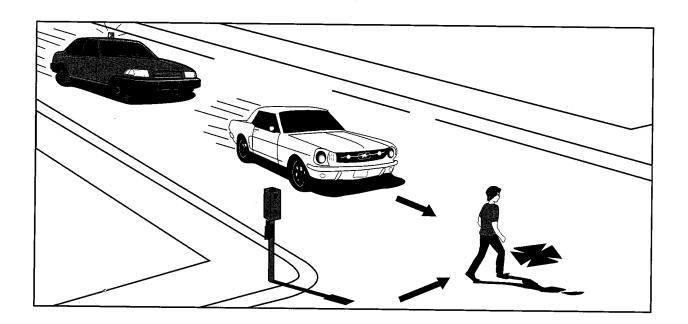

Description: The pedestrian was struck by a vehicle on an emergency/police mission, or by a vehicle being pursued.

Summary: These few crashes happened exclusively to adult (age 25 to 44) pedestrians.

Four of the five cases occurred in an urban area, on a weekday, and during conditions of darkness. Three of the pedestrians had been drinking.

Pedestrian Age Hot Pursuit All Crashes 40 20 0-9 10-14 15-19 20-24 25-44 45-64 65+


Figure 15. Pedestrian age in "Hot Pursuit."

Pedestrian-Motor Vehicle Crash Types

Disabled/Emergency Vehicle Related

Disabled Vehicle Related

Frequency: 124 cases; 2.5% of all crashes **Severity:** 42% resulted in serious or fatal injuries

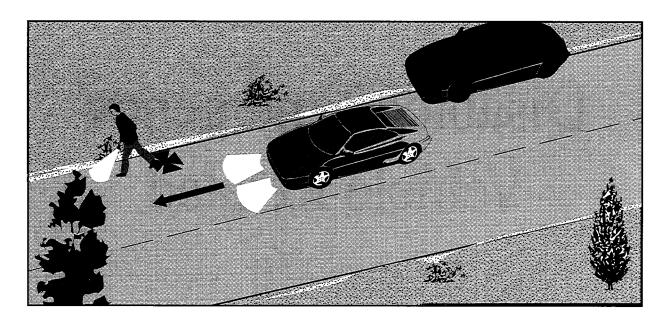

Description: The pedestrian was struck while walking to or from (9 cases) or while near or next to (105 cases) a disabled vehicle (no emergency vehicle present), or while near an active police or emergency vehicle (10 cases).

Summary: In comparison to all crashes, this crash was more likely to involve adult (age 25 to 44) pedestrians.

Almost 40 percent occurred during dark, no lights conditions, and almost 20 percent took place on roads with 5 to 10 lanes. More than 50 percent happened on roads with a speed limit of 80+km/h, and in 27 percent of the cases the pedestrian was on the shoulder.

Almost half occurred on the weekend.

Twelve percent of drivers had been drinking.

This crash type tended to more serious than the average.





Figure 16. Pedestrian age in "Disabled Vehicle Related."

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70

Percent

Number of Lanes



Speed Limit (km/h)




Figure 17. Light condition, number of lanes, and speed limit in "Disabled Vehicle Related."

Alcohol use

Pedestri	an						7%
Driver		•			•]	12%

Development Character

Urban	•							56%
Rural			•	•	•	•		44%

Day of Week

Weekday					55%
Weekend					45%

Road Feature

No special feature 72%
Intersection 15%
Private driveway <1%
Public driveway <1%
Alley 0%
All other 12%

Pedestrian Location

Travel lane	. 61%
Shoulder	. 27%
Median	4%
All other	8%

	·		


Pedestrian-Motor Vehicle Crash Types

Working/Playing In Roadway

Working On Roadway

Frequency: 69 cases; 1.4% of all crashes

Severity: 20% resulted in serious or fatal injuries

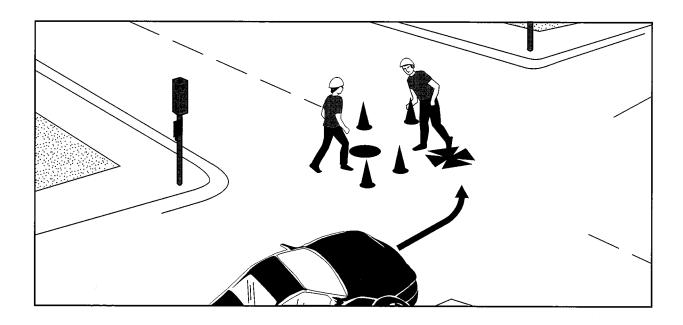

Description: The pedestrian (e.g., police/emergency personnel, flagman, road maintenance crew, etc.) was struck while working on, in, over, or under the roadway.

Summary: In comparison to all crashes, this crash was more likely to involve adult (age 25 to 44) and middle adult (age 45 to 64) pedestrians.

Eighty percent occurred during daylight conditions, and more than 25 percent happened on roads with a speed limit of 80+ km/h.


None of the pedestrians had been drinking.

This crash was less severe than the average.


Pedestrian Age Working All Crashes 40 0-9 10-14 15-19 20-24 25-44 45-64 65+

Figure 18. Pedestrian age in "Working On Roadway."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 19. Light condition, number of lanes, and speed limit in "Working On Roadway."

Alcohol use

Pedestr	ia	n					0%
Driver							7%

Development Character

Urban							60%
Rural		•					40%

Day of Week

Weekday				76%
Weekend				24%

Road Feature

No special feature	60%
Intersection	29%
All other	10%


Pedestrian Location

Travel lane 71%
Shoulder 10%
Roadway, unknown . 6%
All other 13%

Play Vehicle Related

Frequency: 35 cases; 0.7% of all crashes

Severity: 38% resulted in serious or fatal injuries

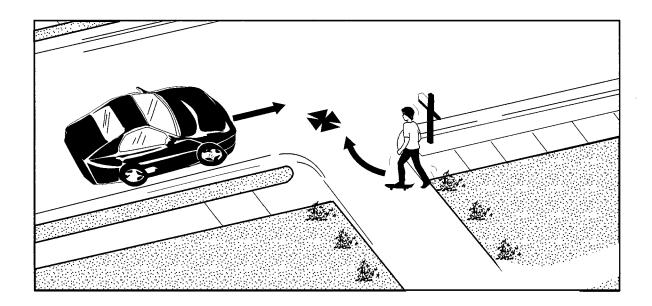

Description: The pedestrian was struck while riding a play vehicle (e.g. wagon, sled, skateboard, skates, "big wheel" type tricycle, or tricycle).

Summary: In comparison to all crashes, this crash was more likely to involve child (ages 0 to 9) and youth (ages 10 to 14) pedestrians.

Eighty percent occurred during daylight conditions, and 11 percent during dawn/dusk. Almost all took place on roads with 1 to 2 lanes, and roads with a speed limit <= 40 km/h were strongly represented.

None of the pedestrians or drivers had been drinking.

This type of crash was slightly more severe than the average.




Figure 20. Pedestrian age in "Play Vehicle Related."

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 80 Percent

Number of Lanes 5+ Play Vehicle All Crashes 1 - 2 - 0 20 40 60 80 100 Percent




Figure 21. Light condition, number of lanes, and speed limit in "Play Vehicle Related."

Alcohol use	
Pedestrian	0%
Driver	0%

Development Character	
Urban 53%	, o
Rural 47%	, o

Day of Wo	eek	
	-	


Road Fea	ture
	No special feature 47%
	Intersection 24%
	Private driveway 15%
	Alley 6%
	All other 9%

Pedestrian Location	
Travel lane 91%	
Alley/Driveway 3%	
Parking lot lanes 3%	
Ped/Multi-use path 3%	

Playing In Roadway

Frequency: 48 cases; 0.9% of all crashes

Severity: 30% resulted in serious or fatal injuries

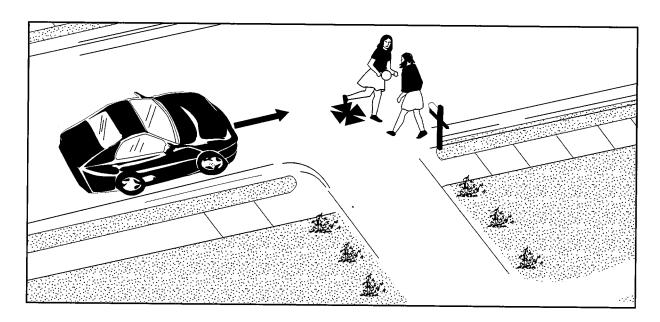

Description: The pedestrian was struck while playing on foot in the roadway prior to the vehicle's appearance.

Summary: In comparison to all crashes, this crash was more likely to involve child (age 0 to 9) and youth (age 10 to 14) pedestrians.

Dawn/dusk was overrepresented with 15 percent of occurrences. Almost all took place on roads with 1 to 2 lanes, and roads with a speed limit <=40 km/h were strongly overrepresented.

Alcohol was generally not a factor in these crashes.




Figure 22. Pedestrian age in "Playing In Roadway."

dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent

Number of Lanes 5+ Playing All Crashes 3-4-1-2-0 20 40 60 80 100 Percent




Figure 23. Light condition, number of lanes, and speed limit in "Playing In Roadway."

Pedestrian 3% Driver 2%
Driver 2%

Development Charac	ter
Urban	69%
Rural	31%

Day of Week	
	68% 32%

Road Feature	
No special feature 71%	
Intersection 24%	
Private driveway 5%	

Pedestrian Location	
Travel lane	90%
All other	10%

	,		
			æ.
		·	


Pedestrian-Motor Vehicle Crash Types

Walking Along Road/ Crossing Expressway

Walking Along Road

Frequency: 375 cases; 7.4% of all crashes

Severity: 37% resulted in serious or fatal injuries

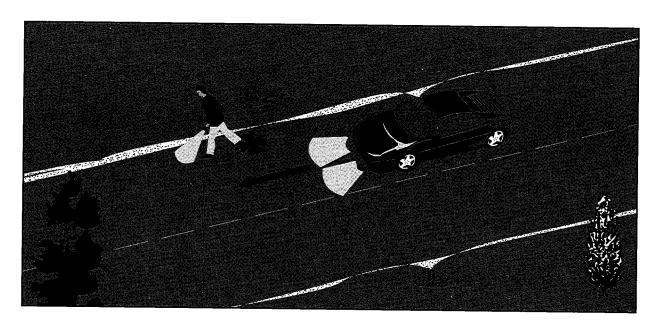

Description: The pedestrian was struck while walking (or running) along a road without sidewalks. The pedestrian may have been:

- hitchhiking (15 cases);
- walking with traffic and struck from behind (257 cases) or from the front (5 cases);
- walking against traffic and struck from behind (76 cases) or from the front (7 cases);
- walking along a road, but the details are unknown (15 cases).

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19), young adult (age 20 to 24), and adult (age 25 to 44) pedestrians.

About 40 percent occurred during dark, no lights conditions. Almost 80 percent were on 1 to 2 lane roads and more than 30 percent on roads with a

speed limit of 80+ km/h. Twenty-eight percent of pedestrians had been drinking.




Figure 24. Pedestrian age in "Walking Along Road."

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent

Number of Lanes 5+ Walking All Crashes 1-2 0 20 40 60 80 100 Percent




Figure 25. Light condition, number of lanes, and speed limit in "Walking Along Road."

Alcohol	use .
	Pedestrian 28%
	Driver 9%

Development Character	
Urban	56%
Rural	44%


Day of Week	
Weekday	56%
Weekend	44%

Road Feature	
No special feature 87%	
Intersection 8%	
Public driveway 2%	
Private driveway 1%	
Alley 0%	
All other 2%	

Pedestrian Location	
Travel lane	50%
Edge of lane :	23%
Shoulder	21%
All other	6%

Expressway Crossing

Frequency: 25 cases; 0.5% of all crashes Severity: 84% resulted in serious or fatal injuries

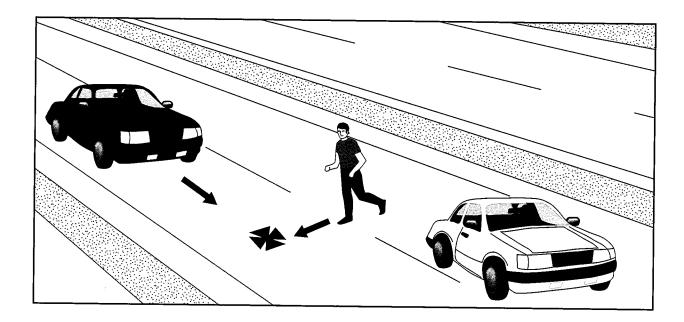

Description: The pedestrian was struck while attempting to cross a limited access expressway.

Summary: This crash did not involve child (ages 0 to 9) or youth (age 10 to 14) pedestrians. Adult (age 25 to 44) and middle adult (age 45 to 64) pedestrians were strongly overrepresented in this crash type.

More than 80 percent occurred under dark conditions and on roads with a speed limit of 80+km/h. Almost all occurred on multilane roads.

Almost half of the pedestrians had been drinking.

"Expressway Crossing" crashes were much more severe than the average.




Figure 26. Pedestrian age in "Expressway Crossing."

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent




Figure 27. Light condition, number of lanes, and speed limit in "Expressway Crossing."

Alcoho	ol use
	Pedestrian 48%
	Driver 4%
Develo	pment Character
•	Urban 64%
	Rural 36%
Dor of	XX7 L
Day of	
	Weekday 56%
	Weekend 44%
**	
Road F	
	No special feature 94%
	All other 6%
-	
Pedestr	ian Location
	Travel lane 96%


Pedestrian-Motor Vehicle Crash Types

Not In Road

Waiting To Cross

Frequency: 32 cases; 0.7% of all crashes

Severity: 32% resulted in serious or fatal injuries

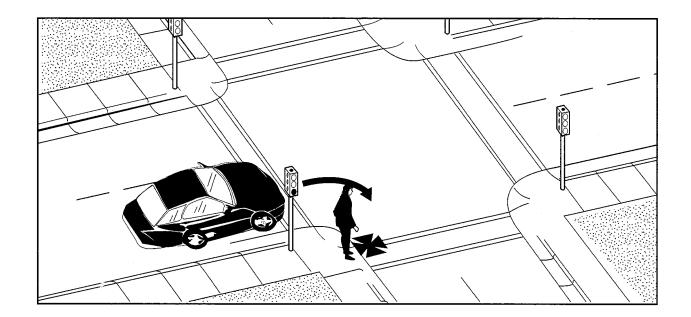

Description: The pedestrian was struck while standing at or near the curb or roadway edge waiting to cross.

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19), adult (age 25 to 44), and middle adult (age 45-64) pedestrians.

Fifty-six percent of the striking vehicles were turning.

This crash tended to occur on lower speed roads and on 1 to 2 lane roads. The pedestrian was most often standing on a sidewalk (38 percent) or shoulder (31 percent).

Pedestrian Age Waiting To Cross






Figure 28. Pedestrian age in "Waiting To Cross."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 29. Light condition, number of lanes, and speed limit in "Waiting To Cross."

Alcohol use

Pedestr	ian	l					12%
Driver							8%

Development Character

Urban							68%
Rural	•	•					32%

Day of Week

Weekday					55%
Weekend					45%

Road Feature

Intersection 59%
No special feature 11%
Public driveway 11%
Alley 4%
All other 15%


Pedestrian Location

Sidewalk .				38%
Shoulder .				31%
Travel lane				18%
All other				13%

Not In Roadway

Frequency: 404 cases; 7.9% of all crashes

Severity: 28% resulted in serious or fatal injuries

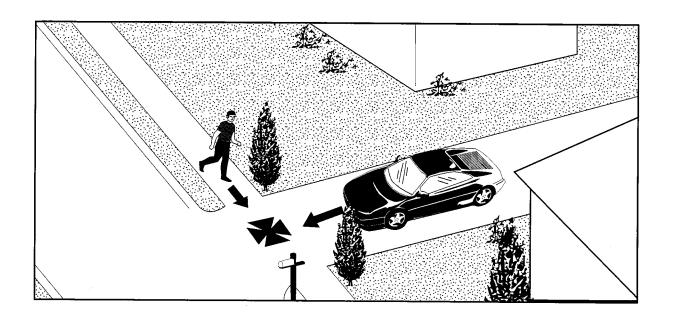

Description: The pedestrian was struck when not in the roadway. Areas included parking lots, driveways, private roads, sidewalks, service stations, yards, etc.

Summary: The pedestrian age profile for this crash closely followed that of all crashes.


In 84 percent of the cases, both the pedestrian and the vehicle were not initially in the roadway. The other 16 percent involved a vehicle that was on the roadway, but left it and struck the pedestrian.

Note: The Road Feature bullet box depicts data for these "left the roadway" events.

More than half of the pedestrians were in a parking lot location. Note: Other crash types, in particular "Driverless Vehicle" and "Backing," may also have occurred in an off-road location.

Pedestrian Age Not In Roadway All Crashes 20 15 0 0-9 10-14 15-19 20-24 25-44 45-64 65+

Figure 30. Pedestrian age in "Not In Roadway."



Alcohol use Pedestrian

Development Character

Urban 63% Rural 37%

Day of Week

Weekday 63% Weekend 37%

Number of Lanes and Speed Limit graphs are not shown because these variables are not relevant to this crash type. **Road Feature**

Public driveway ... 15% No special feature .. 11% Private driveway ... 6% All other ... 66%

Pedestrian Location

Parking lot lanes . . . 28%
Parking lot space . . 16%
Alley/Driveway . . . 16%
Sidewalk 15%
Parking lot, other . . . 9%
All other 16%


Pedestrian-Motor Vehicle Crash Types

Intersection Related

Multiple Threat At Intersection

Frequency: 64 cases; 1.3% of all crashes

Severity: 28% resulted in serious or fatal injuries

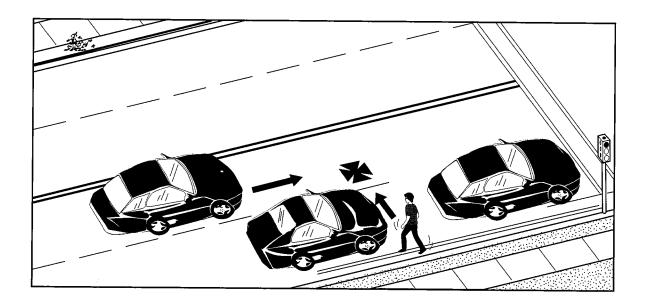

Description: At an intersection, the pedestrian entered the traffic lane in front of standing or stopped traffic and was struck by another vehicle traveling in the same direction as the stopped traffic.

Summary: In comparison to all crashes, this crash was more likely to involve youth (age 10 to 14) and teen (age 15 to 19) pedestrians.

More than 80 percent occurred under daylight conditions.

Nearly three-fourths occurred on multilane roads and almost 80 percent on roads with a speed limit between 50 and 70 km/h.

This crash was slightly less severe than the average.

Pedestrian Age 35 30 25 20 15 10

10-14 15-19 20-24 25-44 45-64

Figure 32. Pedestrian age in "Multiple Threat At Intersection."

Ó

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100 Percent




Figure 33. Light condition, number of lanes, and speed limit in "Multiple Threat At Intersection."

Alcohol use	
Pedestrian	4%
Driver	0%

Development Character	
Urban	. 70%
Rural	30%

Day of Week	
Weekday	75%
Weekend	25%


Road Feature		
Intersection	100)%

Pedestrian Location	
Travel lane	100%

Vehicle Turn/Merge

Frequency: 497 cases; 9.8% of all crashes

Severity: 18% resulted in serious or fatal injuries

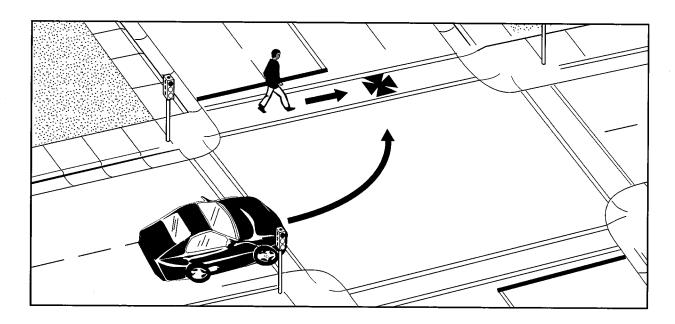

Description: The pedestrian and vehicle collided while the vehicle was preparing to turn, in the process of turning, or had just completed a turn (or merge).

Summary: In comparison to all crashes, this crash was more likely to involve adult pedestrians ages 25 and above.

This was largely an urban event (77%).

It was more likely to occur on 3 to 4 lane roads and on roads with speed limits of 50 to 60 km/h.

"Vehicle Turn/Merge" crashes were less severe than the average.

Pedestrian Age 35 Turn/Merge All Crashes






Figure 34. Pedestrian age in "Vehicle Turn/Merge."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 35. Light condition, number of lane, and speed limit in "Vehicle Turn/Merge."

Alcohol use

Pedestr	ia	n					5%
Driver							3%

Development Character

Urban						77%
Rural						23%

Day of Week

Weekday		 		77%
Weekend		 		23%

Road Feature


Intersection				96%
All other				. 4%

Pedestrian Location

Travel lane				9	99%
Median					1%

Intersection Dash

Frequency: 363 cases; 7.2% of all crashes Severity: 34% resulted in serious or fatal injuries

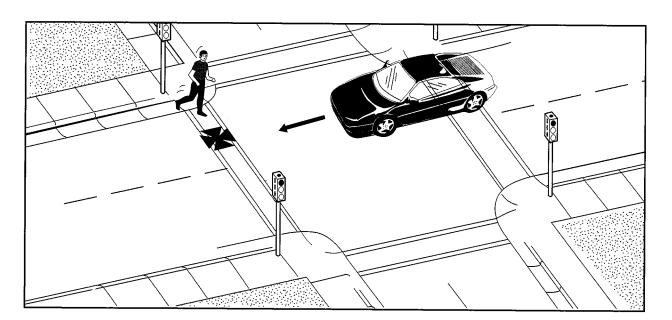

Description: The pedestrian was struck while running through an intersection and/or the motorist's view of the pedestrian was blocked until an instant before impact.

Summary: In comparison to all crashes, this crash was much more likely to involve child (age 0 to 9) and youth (age 10 to 14) pedestrians.

More than 70 percent occurred under daylight conditions. Overall 9 percent of the pedestrians had been drinking, but 48 percent of those ages 25 to 44.

The "Number of Lanes" and "Speed Limit" variables were typical of all crashes, with greatest numbers occurring on 1 to 2 lane and 50 to 60 km/h roads.

Pedestrian Age 50 Intersection Dash All Crashes






Figure 36. Pedestrian age in "Intersection Dash."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 37. Light condition, number of lanes, and speed limit in "Intersection Dash."

Alcohol use

Pedestria	n					9%
Driver .						3%

Development Character

Urban						71%
Rural						29%

Day of Week

Weekday	•				66%
Weekend					34%

Road Feature

Intersection 100%


Pedestrian Location

Travel lane 100%

Trapped

Frequency: 41 cases; 0.8% of all crashes

Severity: 12% resulted in serious or fatal injuries

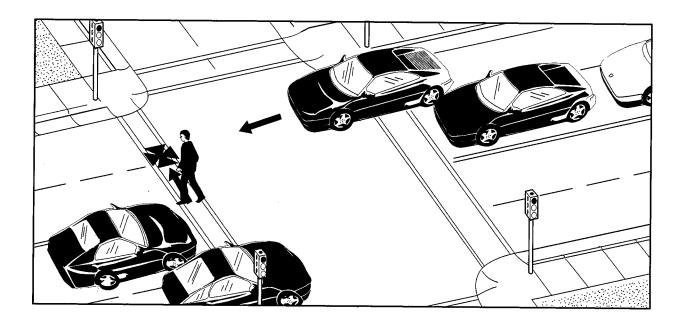

Description: The pedestrian was struck while crossing at a signalized intersection when the light changed and traffic started moving.

Summary: In comparison to all crashes, this crash was more likely to involve youth (age 10 to 14) and elderly (age 65+) pedestrians.

Multilane roads were stongly overrepresented in this crash type.

"Trapped" crashes were much less likely to result in serious injury than average.




Figure 38. Pedestrian age in "Trapped."

dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 80 Percent




Figure 39. Light condition, number of lane, and speed limit in "Trapped."

	l use
	Pedestrian 0%
	Driver 3%
Dovolo	
Develoj	pment Character
	Urban
Day of '	Week
Day of '	Week Weekday 76%

Road Feature		
Intersection	100%	


Pedestrian Location	
Travel lane	100%

Walked Into Vehicle

Frequency: 42 cases; 0.9% of all crashes

Severity: 20% resulted in serious or fatal injuries

At Intersection

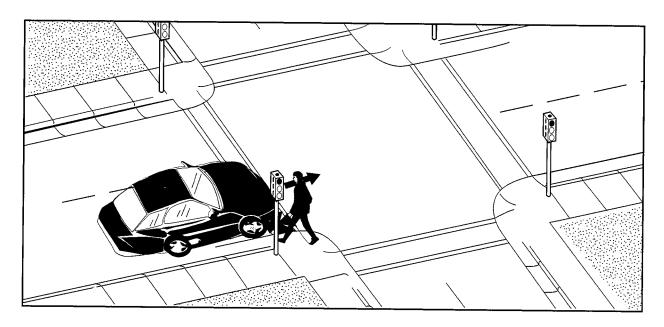

Description: The pedestrian walked into (i.e., struck) the vehicle at an intersection. The pedestrian may have stepped into the travel lane and instaneously collided with the vehicle (13 cases), or may have been walking in the lane prior to colliding with the vehicle (11 cases) (18 cases were undetermined).

Summary: The age profile for this crash generally followed that of all crashes combined.

Almost half the crashes occurred on 3 to 4 lane roads. Most occurred on 50 to 60 km/h roads, but more than a fourth took place on 60 to 70 km/h roads.

Overall, 38 percent of the pedestrians had been drinking. Thirteen of the 21 (62 percent) pedestrians age 20 to 64 had been drinking.

A lower percentage than average were seriously injured or killed.







Figure 40. Pedestrian age in "Walked Into Vehicle At Intersection."

Light Condition dark, no lights dark, lighted dawn/dusk 0 10 20 30 40 50 60 70 Percent

Number of Lanes



Speed Limit (km/h)



Figure 41. Light condition, number of lanes, and speed limit in "Walked Into Vehicle At Intersection."

Alcohol u	use
-----------	-----

Pedestr	ian				38%
Driver					. 3%

Development Character

Urban			•			73%
Rural						27%

Day of Week

Weekday			•		73%
Weekend					27%

Road Feature

Intersection					97%
Public drivew	a	y			. 3%


Pedestrian Location

Travel lane 100%

Driver Violation At Intersection

Frequency: 259 cases; 5.1% of all crashes

Severity: 28% resulted in serious or fatal injuries

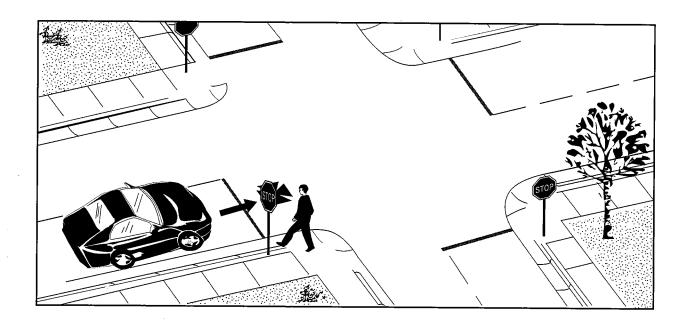

Description: The pedestrian was struck by a vehicle proceeding straight ahead and the report indicated that the driver committed a violation such as careless driving, failed to yield, signal/sign violation, speeding, or DWI, etc.

Summary: The age profile for this crash generally followed that of all crashes combined, though child (age 0 to 9) pedestrians were less likely to be involved.

Eighty percent occurred in urban areas, and lower speed roads were slightly overrepresented.

This crash resulted in somewhat less serious injuries than average.

Pedestrian Age




Figure 42. Pedestrian age in "Driver Violation At Intersection."

Light Condition dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent




Figure 43. Light condition, number of lanes, and speed limit in "Driver Violation At Intersection."

	Pedestrian 8%
	Driver 5%
Develo	pment Character
Develo	pment Character Urban 80%

Weekday	74%
	26%


Koad Fea	ture			
	Intersection		100%	
		_		
				_

Pedestrian Location	
Travel lane	100%

Intersection-

Frequency: 364 cases; 7.2% of all crashes Severity: 42% resulted in serious or fatal injuries

Ither

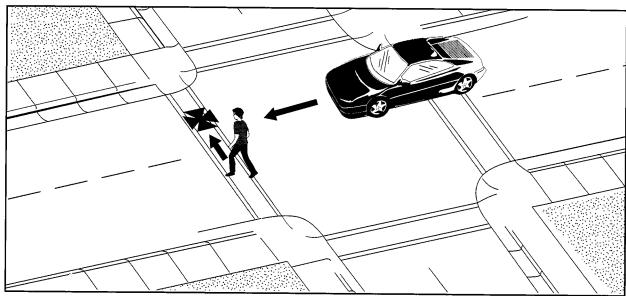

Description: The crash occurred at an intersection but does not conform to any of the specified crash types.

Summary: In comparison to all crashes, this crash was less likely to involve child (age 0 to 9) pedestrians.

Forty-four percent of the involved pedestrians had been walking in the travel lane prior to impact, 4 percent had been standing in the roadway, 16 percent stepped into the travel lane and were instantaneously struck, and 7 percent misjudged the crossing gap. Thirty percent were undetermined.

More than 40 percent occurred under dark, lighted conditions. Multilane roads were also overrepresented.

Forty-two percent of pedestrians ages 25 to 64

had been drinking. These crashes were more severe than the average.

Pedestrian Age




Figure 44. Pedestrian age in "Intersection-Other."

dark, no lights Int—Other All Crashes dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70 Percent





Figure 45. Light condition, number of lanes, and speed limit in "Intersection—Other."

	Pedestrian 27%
	Driver 5%
Develop	oment Character
Develop	Oment Character Urban 73%



Road Feature	
Intersection	 100%

Pedestrian Location	
Travel lane	100%

·			-
		·	


Pedestrian-Motor Vehicle Crash Types

Midblock Related

Multiple Threat At Midblock

Frequency: 46 cases; 0.9% of all crashes

Severity: 41% resulted in serious or fatal injuries

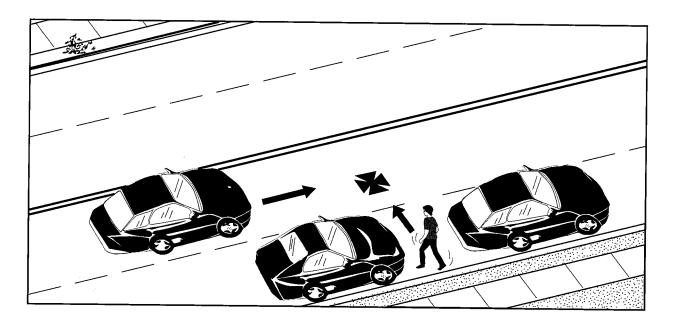

Description: The pedestrian entered the traffic lane at midblock in front of standing or stopped traffic and was struck by another vehicle moving in the same direction as the stopped traffic.

Summary: In comparison to all crashes, this crash was more likely to involve youth (age 10 to 14) pedestrians.

Almost 90 percent occurred under daylight conditions.

Multilane roads were, by definition, strongly overrepresented. This was also very likely to be a weekday rather than weekend event.

Alcohol was generally not a factor.

This crash tended to be more serious than the average.




Figure 46. Pedestrian age in "Multiple Threat At Midblock."

dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100 Percent




Figure 47. Light condition, number of lanes, and speed limit in "Multiple Threat At Midblock."

Pedestrian 3%
Driver 0%

_	Urban	
		

Day of Week	
Weekday	87%
Weekend	13%


Road Feature	
No special feature.	100%

Pedestrian Location	
Travel lane	100%

Midblock Dart Out

Frequency: 232 cases; 4.6% of all crashes

Severity: 32% resulted in serious or fatal injuries

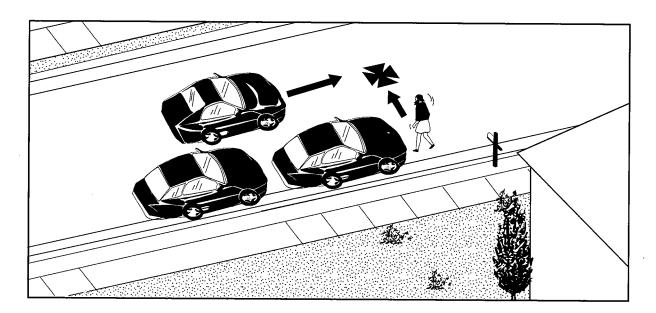

Description: At a midblock location, the motorist's view of the pedestrian was blocked until an instant before impact.

Summary: In comparison to all crashes, this crash was much more likely to involve child (age 0 to 9) pedestrians. Youth (age 10 to 14) were also slightly overrepresented.

Seventy-six percent of the pedestrians were struck in their first half of the roadway, 22 percent in their second half of the roadway, and 2 percent were unable to be specified.

This was largely an urban event (78 percent). Eighty percent occurred under daylight conditions. One to 2 lane roads and very low speed roads (<=40 km/h) were strongly overrepresented.




Figure 48. Pedestrian age in "Midblock Dart Out."

dark, no lights dark, lighted dawn/dusk daylight 0 20 40 60 80 100 Percent




Figure 49. Light condition, number of lanes, and speed limit in "Midblock Dart Out."

Alcohol use	
Pedestrian	3%
Driver	4%
	_

Development Character	
Urban 78%	
Rural 22%	
	


Day of Week	
-	63%
Weekend	37%

Road F	eature
	No special feature 92%
	Private driveway 4%
	All other 4%

Pedestrian Location	
Travel lane	100%

Midblock Dash

Frequency: 442 cases; 8.7% of all crashes **Severity:** 37% resulted in serious or fatal injuries

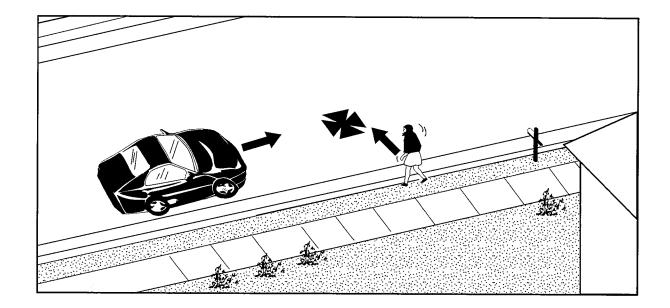

Description: At a midblock location, the pedestrian was struck while running and the motorist's view of the pedestrian was **not** obstructed.

Summary: In comparison to all crashes, this crash was much more likely to involve child (age 0 to 9) pedestrians. Youth (age 10 to 14) were also slightly overrepresented.

Although still occurring mostly on 1 to 2 lane roads, these crashes generally took place on higher speed roads than the "Midblock Dart Out" type crashes. Nearly a third occurred on roads with speeds of 60+ km/h.

Forty-five percent of adults ages 20 to 64 had been drinking.

"Midblock Dash" crashes were slightly more severe than average.

Pedestrian Age




Figure 50. Pedestrian age in "Midblock Dash."

Light Condition dark, no lights — Midblock Dash All Crashes dark, lighted dawn/dusk — daylight — 0 10 20 30 40 50 60 70

Percent




Figure 51. Light condition, number of lanes, and speed limit in "Midblock Dash."

Alcohol use	
Pedestrian	10%
Driver	5%

Development Character	•
Urban	63%
Rural	37%

Weekday 64% Weekend 36%	Day of Week	


Road Feature	
No special feature 89%	
Private driveway 4%	
Public driveway 2%	
All other 5%	

Pedestrian Location	
Travel lane	100%

Walked Into Vehicle At Midblock

Frequency: 76 cases; 1.5% of all crashes

Severity: 32% resulted in serious or fatal injuries

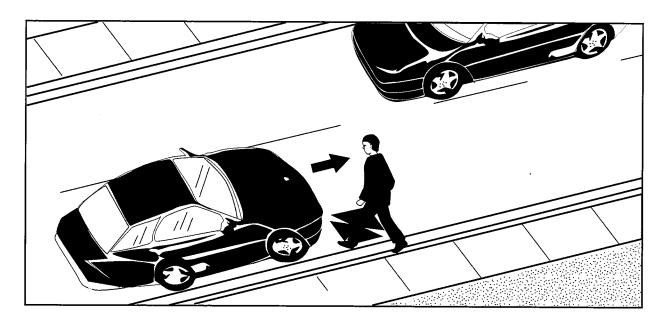

Description: The pedestrian walked into (i.e., struck) the vehicle at a midblock location. The pedestrian may have stepped into the travel lane and instantaneously collided with the vehicle (24 cases) or may have been walking in the lane prior to colliding with the vehicle (18 cases) (34 cases were undetermined).

Summary: In comparison to all crashes, this crash was more likely to involve child (age 0 to 9) and adult (age 25 to 44) pedestrians.

The light condition and roadway variables generally followed the distribution for all crashes combined.

Fifty-seven percent of pedestrians ages 20 to 64 had been drinking.




Figure 52. Pedestrian age in "Walked Into Vehicle At Midblock."

dark, no lights dark, lighted dawn/dusk daylight 0 10 20 30 40 50 60 70

Percent




Figure 53. Light condition, number of lanes, and speed limit in "Walked Into Vehicle At Midblock."

Urban 62%	Development Character	
	Urban	62%
Rural 38%	Rural	38%


Day of Week	
Weekday	61%
	39%

Road Feature	
No special feature	89%
Public driveway	. 2%
Private driveway	
All other	

Pedestrian Location		
Travel lane	. 99%	
Parking lot lane	1%	

Midblock— Other

Frequency: 548 cases; 10.8% of all crashes **Severity:** 49% resulted in serious or fatal injuries

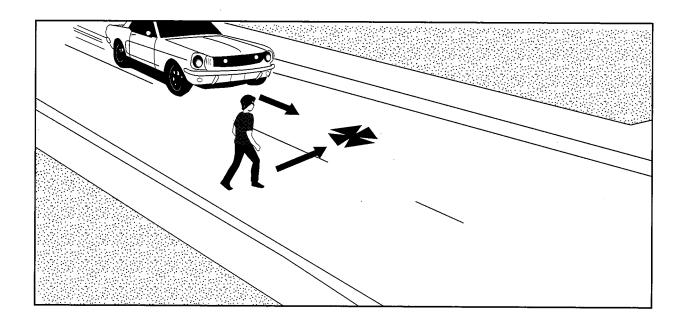

Description: The crash occurred at midblock but does not conform to any of the specified crash types.

Summary: In comparison to all crashes, this crash was more likely to involve adult pedestrians ages 25 and older.

Six percent of the pedestrians misjudged the crossing gap, 9 percent had been standing in the roadway, 11 percent stepped into the travel lane and were instantly struck, and 36 percent had been walking in the travel lane prior to impact. Thirty-eight percent were undetermined.

More than half of these crashes occurred under conditions of darkness, and 41 percent on weekends.

Overall, 33 percent of pedestrians had been drinking, and 45 percent of those ages 20 to 64.

These crashes were much more severe than average.








Figure 54. Pedestrian age in "Midblock—Other."

Light Condition



Number of Lanes



Speed Limit (km/h)




Figure 55. Light condition, number of lanes, and speed limit in "Midblock—Other."

Alcohol use

Pedestri	an				3	33%
Driver						9%

Development Character

Urban						67%
Rural						33%

Day of Week

Weekday					59%
Weekend					41%

Road Feature

No special feature 88%
Public driveway 3%
Private driveway 2%
All other 7%

Pedestrian Location

Travel lane	99%
Road related; unk	. 1%

		•
	•	
		•

Pedestrian-Motor Vehicle Crash Types

Other Or Inadequate Information

Lying In Road

Frequency: 22 cases; 0.4% of all crashes

Severity: 67% resulted in serious or fatal injuries

Description: The pedestrian was lying in the road and was struck by a moving vehicle.

Summary: This crash involved primarily adult (age 25 to 44) pedestrians who accounted for more than 70 percent of the crashes.

More than 60 percent occurred under conditions of darkness, no lights.

Forty-two percent of the pedestrians had been drinking.

As would be expected, these crashes were much more likely than average to result in serious or fatal injuries.




Figure 56. Light Condition in "Lying In Road."




Figure 57. Pedestrian age in "Lying In Road."

Suicide

Frequency: 6 cases; 0.1% of all crashes

Severity: 100% resulted in serious or fatal injuries

Description: The pedestrian committed suicide or attempted suicide by deliberately walking, running, jumping, etc. in front of a moving vehicle.

Summary: These few crashes occurred exclusively to pedestrians ages 15 to 44.

Dark light conditions were strongly overrepresented.

Half of the pedestrians had been drinking.

All resulted in severe or fatal injuries.




Figure 58. Light Condition in "Suicide."




Figure 59. Pedestrian age in "Suicide."

Assault With Vehicle

Frequency: 55 cases; 1.1% of all crashes

Severity: 18% resulted in serious or fatal injuries

Description: The driver intentionally caused the vehicle to strike a pedestrian.

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19), young adult (age 20 to 24), and adult (age 25 to 44) pedestrians.

Nearly half of the pedestrians were in the travel lane, 18 percent were in a parking lot location, and 13 percent on the shoulder of the road.

Alcohol was not reported as a major factor in these crashes.

Only 18 percent resulted in a serious or fatal injury.

Light Condition




Figure 60. Light condition in "Assault With Vehicle."

Pedestrian Age Assault All Crashes 10 0

10-14 15-19 20-24 25-44 45-64

Figure 61. Pedestrian age in "Assault With Vehicle."

Domestic/Dispute Related

Frequency: 76 cases; 1.5% of all crashes

Severity: 23% resulted in serious or fatal injuries

Description: The pedestrian was struck by a vehicle during the course of a domestic or other dispute.

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19), young adult (age 20 to 24), and adult (age 25 to 44) pedestrians.

Half occurred under conditions of darkness, and more than 40 percent on very low speed (<= 40 km/h) roads.

Twenty-six percent of pedestrians had been drinking.

This crash tended to be less severe than the average.




Figure 62. Light Condition in "Domestic/Dispute Related."




Figure 63. Pedestrian age in "Domestic/Dispute Related."

Pedestrian On Vehicle

Frequency: 40 cases; 0.8% of all crashes

Severity: 31% resulted in serious or fatal injuries

Description: The pedestrian was sitting on, leaning against, or clinging to a vehicle which began to move or was moving.

Summary: In comparison to all crashes, this crash was much more likely to involve youth (age 10 to 14) and teen (age 15 to 19) pedestrians.

Twenty-six percent of pedestrians and 15 percent of motor vehicle operators had been drinking.




Figure 64. Light Condition in "Pedestrian On Vehicle."




Figure 65. Pedestrian age in "Pedestrian On Vehicle."

Vehicle-Vehicle Crash

Frequency: 61 cases; 1.2% of all crashes

Severity: 26% resulted in serious or fatal injuries

Description: The pedestrian was struck as a result of a prior vehicle-vehicle collision.

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19) and adult (age 25 to 44) pedestrians.

Twenty-one percent of pedestrians were on a sidewalk and 15 percent were in on-street parking when struck.

Fourteen percent of drivers had been drinking.




Figure 66. Light Condition in "Vehicle-Vehicle Crash."




Figure 67. Pedestrian age in "Vehicle-Vehicle Crash."

Vehicle-Object Crash

Frequency: 25 cases; 0.5% of all crashes

Severity: 11% resulted in serious or fatal injuries

Description: The pedestrian was struck as a result of a prior vehicle-object (e.g. building; pole; sign, etc.) collision.

Summary: In comparison to all crashes, this crash was more likely to involve adult pedestrians age 25 and older. Middle (age 45 to 64) and elder adults (age 65+) were strongly overrepresented.

Alcohol was generally not a factor in these crashes.

Vehicle-Object Crashes were less severe than the average.




Figure 68. Light Condition in "Vehicle-Object Crash."




Figure 69. Pedestrian age in "Vehicle-Object Crash."

Weird

Frequency: 85 cases; 1.7% of all crashes

Severity: 45% resulted in serious or fatal injuries

Description: The pedestrian was struck by a vehicle, but the circumstances were unusual and did not conform to any specified crash type.

Summary: In comparison to all crashes, this crash was more likely to involve teen (age 15 to 19), young adult (age 20 to 24), and adult (age 25 to 44) pedestrians.

Darkness, with and without lights, were overrepresented light conditions.

About two-third of these crashes took place on 1 to 2 lane roads.

Twenty-seven percent of pedestrians and 14 percent of drivers had been drinking.




Figure 70. Light Condition in "Weird."




Figure 71. Pedestrian age in "Weird."

Inadequate Information

Frequency: 27 cases; 0.5% of all crashes

Severity: 41% resulted in serious or fatal injuries

Description: Insufficient information was available to specify the crash type.

Summary: Pedestrians ages 10 to 44 were slightly overrepresented.

More than 40 percent occurred under conditions of darkness, no lights.

Forty percent of pedestrians and 13 percent of drivers had been drinking.




Figure 72. Light Condition in "Inadequate Information."




Figure 73. Pedestrian age in "Inadequate Information."

APPENDIX


Coding Guidelines for Pedestrian Crash Typing

Adapted from the NHTSA "Manual Accident Typing for Pedestrian Accidents - Coder's Handbook" *

- 1. Read the police accident report carefully and completely:
 - First, read the narrative. In cases of conflicting stories give:
 - First priority to officer's conclusions.
 - Second priority to witness statements.
 - Third priority to pedestrian and driver statements.

DESCRIBE WHAT MAPPENED: VEHICLE P.F.D.S.S.T.R.Y.B.N. W. HICL F.H.C.N.G. T.R.H.F.F.I.C. P.F.T.E.R. S.T.R.Y.N.G. T.Y. A.T. T.H.E. S.C.E. T.E.	TRAVELED SOUTH AND STRU WALS WALLSTON NORTH ON WENEY CONTINUED TRAVEL E PEDESTRIAN, THE PEDESTRI	CK THE APTICAL WAS SOUTH AN REMAINED

- Next, review the information in the specific information categories (i.e., the "check off" boxes) such as time, day, violations, weather, pedestrian age, driver age, and roadway information.

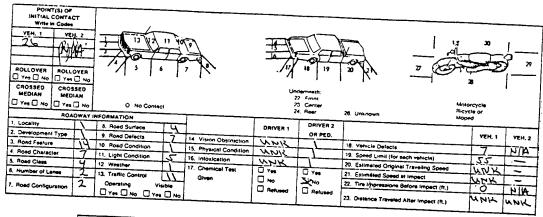


Ortiver 1 2 1. No violation indicated 2. Alcohol use 3. Orug use 5. Stop sign 6. Traffic signal 7. Exceeding speed limit 6. Exceeding speed 1 mit 7. Exceeding speed 9. Minimum speed law	NTRIBUTING CIRCUMSTANCES (Check as mar private to the control of t	Orther 1 2 19. Safe movement violation 20. Following too closely 21. Improper backling 22. Improper parking 23. Unable to determine 24. Leh of center 25. Right turn on red 26. Other PEMDING
--	--	--

* A version of this manual is included as Appendix A in the parent report for this project entitled "Pedestrian and Bicycle Crash Types of the Early 1990's" by William W. Hunter, Jane C. Stutts, Wayne E. Pein and Chante L. Cox (Report No. FHWA-RD-95-163).

Finally, examine the diagram. Remember that diagrams are seldom drawn to scale. Although a diagram might appear to show an accident occurred at an intersection, for example, check the report form for the actual measurement of the point of impact from the nearest intersection.

Note that for pedestrian crashes, the boundaries of an intersection crash extend up to and including 50 feet from the corner. Alleys and driveways are only considered intersections when they are controlled by a traffic signal.

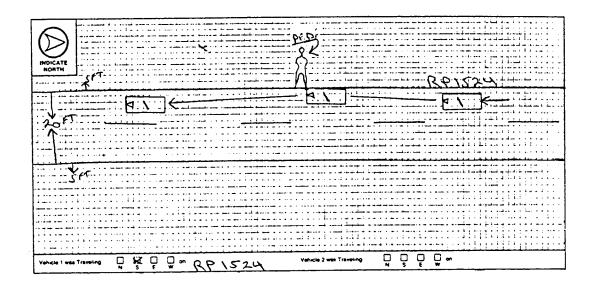

2. Review the descriptions of the Pedestrian Accident Type Categories page in order (see chart).

For the sample case shown, category 5 applies—pedestrian was struck while walking or running along roadway.

Turn to the tabbed page for that category and read down the accident type
descriptions in order. Stop at the <u>first</u> category that fits the facts on the report.
Refer to the Definitions and Diagrams for explanations of terms and examples.

In this case, the pedestrian was not hitchiking or crossing a limited access expressway (Types 510 and 520). He also was not walking or running along a road in the same direction as traffic (Type 531). However, he was walking or running along a road facing traffic (Type 532).

- 4. Enter the code for that accident type beside the report number on the data form.
- 5. If none of the types apply, refer back to the Pedestrian Accident Type Categories page and continue down the list until you find the next category that applies.

If more than one pedestrian is involved in an accident, the first pedestrian struck defines the accident. Consider only the circumstances surrounding the collision with the first pedestrian in determining the type.

Tab 1	Did motorist stike ped going to/from or crossing near: bus or bus stop? ice-cream vendor? rural residential mailbox?
	Or was ped exiting/entering a stopped or parked vehicle?
Tab 2	Was the striking vehicle: driverless? backing? in pursuit, being pursued, or an emergency vehicle?
Tab 3	Was ped struck by motorist while going to/from or near/next to a: disabled vehicle? active police/emergency vehicle?
Tab 4	Was ped stuck while: working in roadway? playing in roadway prior to motorist's appearance? on a play vehicle?
Tab 5	Was ped struck by motorist while: hitchhiking? crossing a limited access expressway? walking or running along a road?
Tab 6	Did motorist stike ped: on/near curb or roadway edge? on sidewalk or other nonroadway location?
Tab 7	Did accident occur at or within 50 feet of an intersection?
Tab 8	Did the accident occur midblock (more than 50 feet from an intersection)?
Tab 9	Other type or inadequate information

			·

			·	
				·